

VAC-4000UHD



4K@60 and HDCP2.2 HDMI Distribution Amplifier (with audio De-embedder)

The IDK VAC-4000UHD is a 4K@60 and HDCP 2.2 supported HDMI 4 distributions amplifier for video and audio. It distributes 4K@60 video signals having four times the resolution of full HD to 4 HDMI output connectors, which support HDCP 2.2.

The VAC-4000UHD converts digital audio into analog audio and output them.

FRONT & REAR PANEL



FEATURES

- Video:**
 - 4K@60 (4:4:4)
 - HDCP 1.4 / 2.2
 - Anti-snow
- Audio:**
 - Converting HDMI embedded audio to analog audio
- Others:**
 - EDID emulation
 - DDC buffering
 - Displaying I/O signal status
 - Connection Reset

2016-04


Ein Vertriebsprodukt von / Distributed by:

VIDELCO Europe Limited – Professionelle Audio-, Video-, Medien-Technik

Telefon: +49 (0)2102 / 86 39-00 • Fax: +49 (0)2102 / 86 39-17 • info@videlco.eu • www.videlco.eu



CONNECTION DIAGRAM

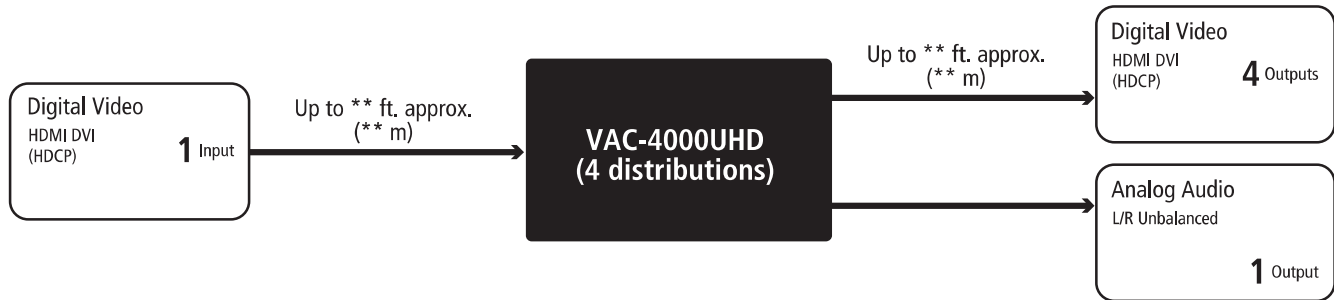

SPECIFICATIONS

Input	Video	Digital	Number / Signal	1 input / HDMI, DVI 1.0 (HDCP 1,4 / 2,2) TMDS single link TMDS clocks: 25 MHz to 300 MHz Dot clocks: 25 MHz to 600 MHz
			Connector	1 female HDMI Type A
		Others		Color depth : 24 bit, 30 bit, 36 bit Deep Color
		Formats		VGA to 4K 480i / 480p / 576i / 576p / 720p / 1080i / 1080p / 4K
Output	Video	Digital	Number / Signal	4 outputs / HDMI, DVI 1,0 (HDCP 1,4 / 2,2) TMDS single link TMDS clocks: 25 MHz to 300 MHz Dot clocks: 25 MHz to 600 MHz
			Connector	4 female HDMI Type A
		Others		Color depth : 24 bit, 30 bit, 36 bit Deep Color
		Formats		VGA to 4K 480i / 480p / 576i / 576p / 720p / 1080i / 1080p / 4K
Output	Audio	Digital	Number / Signal	4 outputs / Multi-channel linear PCM up to 8 channels Sampling frequency: 32 kHz to 192 kHz Sample Size: 16 bit to 24 bit Baseline level: -20 dBFS Maximum I/O level: 0 dBFS
			Connector	4 female HDMI Type A
		Analog	Number / Signal	1 output / Stereo L/R unbalanced signals Output impedance: 75 Ω, Standard level: -10 dBu Maximum output level: +10 dBu
			Connector	1 RCA jack
Plug & Play				DDC2B (built-in EDID / EDID copied from monitors / can be selected from EDID of connected monitors) Built-in EDID: the maximum resolution can be selected.
Automatic cable equalization				Input: 16.4 ft. to ** ft. approx. (5 m to ** m) Output: 16.4 ft. to ** ft. approx. (5 m to ** m)
Functions				Input and output cable equalization, Audio A/D and D/A conversion, Anti-snow, De-embedded audio from HDMI signal, DDC buffer, 7-segment LED signal status check, Connection Reset, Key lock
Others	Power	100 - 240 VAC ± 10 %, 50 Hz/60 Hz ± 3 Hz		
	Power consumption	TBD		
	Dimensions	8,27 x 1,73 x 7,87' / 210 (W) x 44 (H) x 200 (D) mm (EIA half size, projections are not included)		
	Weight	TBD		
	Temperature	Operating: 32°F to 104°F (0°C to +40°C) Storage: -4°F to 176°F (-20°C to +80°C)		
Humidity		Operating / Storage humidity: 20% to 90% (Non Condensing)		