

PU-1H2HBTE HDMI to HDBaseT™ Splitter

1 HDMI to 2 HDBaseT™ Splitter (100m) including additional HDMI output



The PU-1H2BTE splitter accepts 1x HDMI input and distributes to 2 HDBaseT™ outputs, plus 1 HDMI bypass output. The HDBaseT™ outputs allow uncompressed HDMI, LAN, PoE, IR, and RS-232 signals to be transmitted over a Single CAT5e/6/7 cable up to 100m. Installers can confidently distribute HDMI signals to 3 displays, and if required, use the HDMI bypass output to cascade the HDMI signal up to 5 times with additional HDBaseT™ splitters.


PU-507RX Receivers are recommended to utilise the full 5-Play™ functionality of the HDBaseT™ outputs of this device.

FEATURES

- Supports all v1.4 HDMI resolutions plus 4k.
- HDMI, HDCP, & DVI compliant
- Supports uncompressed video/audio up to 10.2Gbps
- Common supported resolutions : HDTV: 480p, 576p, 1080i, 1080p, 1080p24, 4K2K; PC: VGA, SVGA, XGA, WXGA, SXGA, UXGA, WUXGA.
- Supports HDCP repeating and CEC functions
- Uncompressed data transfer over single CAT cable (100m - CAT6/7; 80m - CAT5e)
- Audio support up to 7.1CH & Dolby TrueHD, DTS-HD
- Supports full 5-Play™ Convergence : HDMI / LAN / PoE (Power over Ethernet) / IR / RS-232
- Supports 3D signals

SPECIFICATIONS

Inputs	1x HDMI [1x HDMI Uncompressed AV and Data] 2x 3.5mm Stereo mini-jack [2x RS-232] 2x 3.5mm Stereo mini-jack [2x Infra Red Receiver]
Outputs	1x HDMI [1x HDMI Uncompressed AV and Data] 2x RJ45 [2x HDMI & Propriety Data] 2x 3.5mm Stereo mini-jack [2x Infra Red Emmitter] 1x RJ45 [1x Ethernet (I/O) IP]
PSU:	24V/2.7A
Dimensions	145mm [W] x 160mm [D] x 30mm [H]
Net Weight	530g
Gross Weight	700g

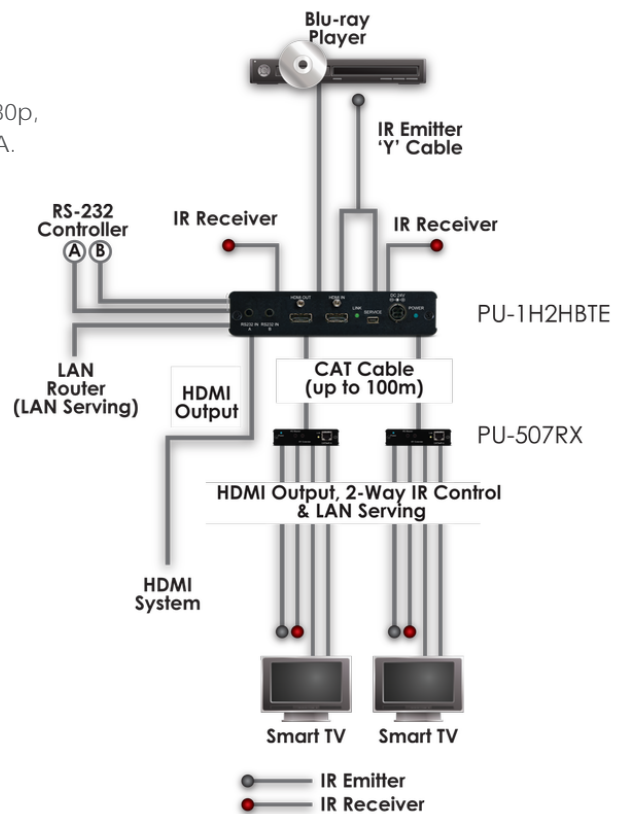

2013-09

Ein Vertriebsprodukt von / Distributed by:

VIDELCO – Professionelle Audio-, Video-, Medien-Technik!

Telefon: +49 (0)2102 / 86 39-00 • Fax: +49 (0)2102 / 86 39-17 • info@videlco.eu • www.videlco.eu

