


HDMI Matrix Router enables you to switch up several HDMI sources from host computers in far locations, multiple digital displays using IR remote control or RS-232C port. Like all Digital Extender products, the HDMI Matrix is built to be the most reliable device of its kind and offers a unique and affordable solution for pro home theater installations where digital switching is a must.



MAIN FEATURES

- A lot of Input and Output: 6 x 6 Channels
- Various User Interface Using RS-232C, IR Remote Control and LAN, Front Keys
- HDCP Compliant at all output channels
- Exhibition video display system
- Control of Home Theater system
- Control Software Included

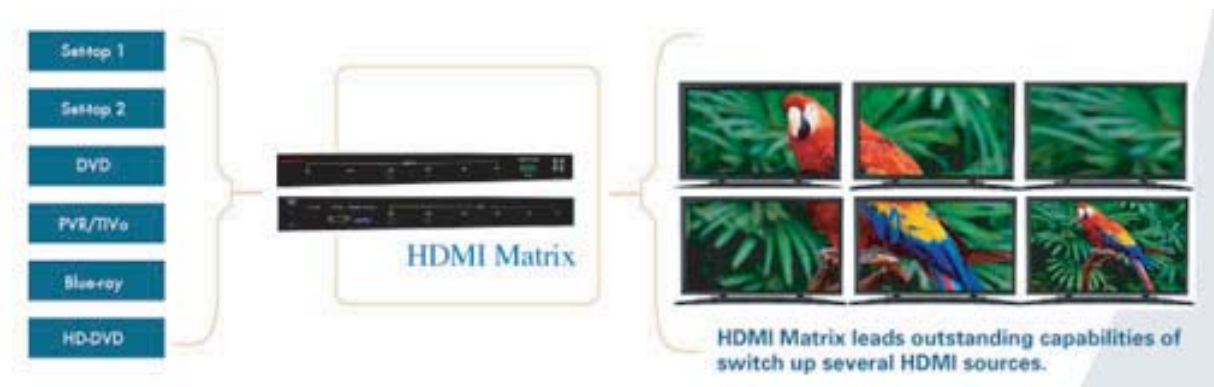

TECHNICAL SPECIFICATIONS

- HDMI v1.3 Bandwidth: 25-340MHz (10.2Gbps)
- Supports Resolution: HDTV Signal up to 1080p@60Hz
- Input Channel : HDMI type A female x 6 Channels
- Output Channel : HDMI type A female x 6 Channels
- HDCP Compliant
- Power Supply : DC 12V, 4.0A
- Power Consumption : 30W
- Operating Temperature & Humidity : 0-40°C, Less than 80% Humidity

DIMENSIONS (mm)

- HS-66M - 400mm*200mm*50mm (WxDxH)

WEIGHT (kg)

- HS-66M – 4 kg