


IEEE 802.3af Power Over Ethernet Injector



PLANET POE-151 is an IEEE 802.3af Power over Ethernet Injector that provides DC 48V over Ethernet cables. The POE-151 IEEE 802.3af Power over Ethernet Injector inserts DC voltage into Cat.5 cable, allowing the cable between the Injector (POE-151) and Splitter (POE-151S-5V/9V/12V) to transfer data and power simultaneously. The maximum distance between the Injector (POE-151) and Splitter (POE-151S-5V/9V/12V) is 100 meters. With POE-151 being installed, it combines the Ethernet digital data with power over the twisted pair cables as an IEEE 802.3af Power over Ethernet Injector. And the IEEE 802.3af Power over Ethernet splitter will split the digital data and the power into two outputs.

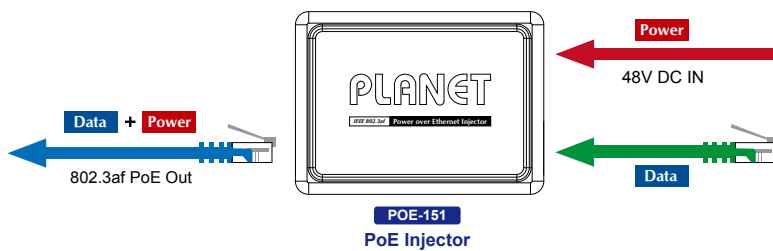

With IEEE 802.3af Power over Ethernet devices being installed, the system administrator only has to use a single RJ-45 Ethernet cable to carry both power and data to each device. Besides, when used with the POE-151S-5V/9V/12V, the POE-151 can offer the benefits of cost saving, easy networking planning and higher reliability. What's more, upon any IEEE 802.3af devices being installed, the POE-151 or together with POE-151S-5V/9V/12V can make the connection while migrating or splitting the power and the Ethernet digital packets, such as connecting the POE-151 to an IEEE 802.3af complied device, AP or IP phone.

- Complies with IEEE 802.3af Power over Ethernet, IEEE 802.3/802.3u 10/100Base-TX
- Provides DC 48V power over RJ-45 Ethernet cable to device with Ethernet port
- LED power input indicators.
- Distance up to 100 meters
- Auto-detects POE IEEE 802.3af equipment, protects devices from being damaged by incorrect installation
- Works with EIA568, category 5,4-pair cables for 10Base-T or 100Base-TX
- EMI standards complies with FCC, CE class B

Left Side




Right Side



Applications


Connecting to IEEE 802.3af devices

Due to the capability of IEEE 802.3af standard, the POE-151 can directly connect with any IEEE 802.3af end-nodes like wireless access point, IP phones and Internet camera which support IEEE 802.3af In-line Power over Ethernet port.

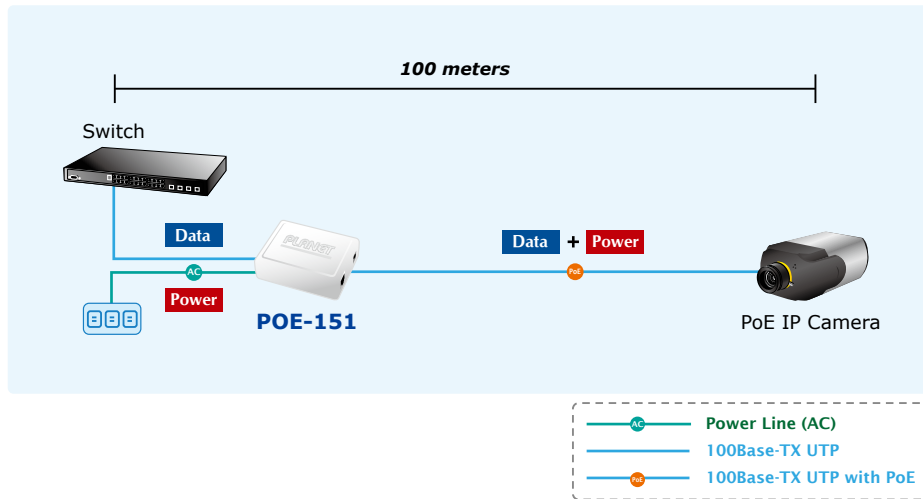

IEEE 802.3af Injector and Splitter Installation


For a place hard to find the power inlet, the POE-151 and POE-151S-5V/9V/12V, as a pair, should provide the easiest way to power your Ethernet devices such as PLANET ICA-110, Internet camera on the ceiling, or WAP-4000, wireless access point that is installed on the top of the building. It's the same with the VIP-153PT, IP phone used in office or home.

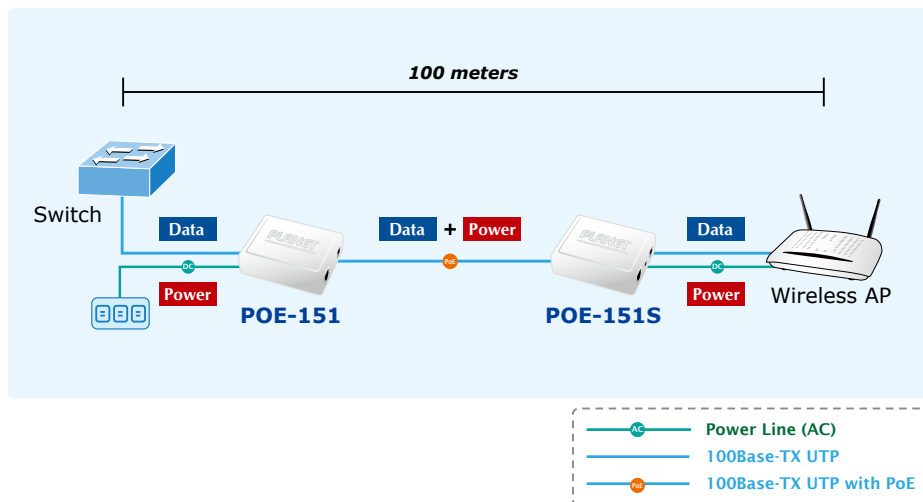

Specifications

Model	POE-151
Hardware version	version 2
Ethernet Connector	2 x RJ-45(1 for data + DC out, 1 for data in)
Ethernet Data rate	10/100Mbps(vary on Ethernet device attached)
Input voltage	DC 48V, 0.4A
Number of devices can be powered	1
Ethernet cable	TIA/EIA-568, Category 5/5e cable
LED indicator	1 x power, 1 x POE ready / in-use
Dimensions (W x D x H)	73 x 55 x 24 mm
EMI	FCC Class B, CE mark
Standard Compliance	IEEE 802.3 Ethernet, IEEE 802.3u Fast Ethernet, IEEE 802.3af Power over Ethernet.

Product Outlook

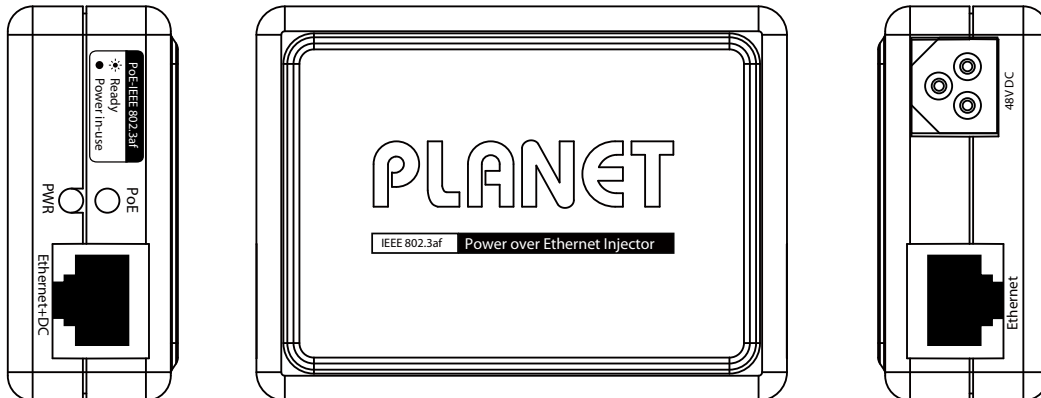

Ordering Information

POE-151

IEEE 802.3af Power Over Ethernet Injector

Related Products

POE-151S

IEEE 802.3af Power Over Ethernet Splitter

POE-E101

IEEE 802.3af Power over Ethernet Extender