


### Dolby Digital Downmixer with Digital / Analogue Audio Conversion



The AU-11DD is designed to decode and downmix Dolby Digital audio signals to analogue stereo. All outputs are simultaneous which is excellent for multi-room audio environments where both digital and analogue zones are required.

#### FEATURES

- Embedded Dolby Digital Decoder technology for Digital downmixing
- Supports Dolby Digital, Analogue Stereo, & LPCM Stereo signals
- Integrated digital interpolator filter and Digital-to-Analogue Converter (DAC)
- Integrated Analogue-to-Digital Converter (ADC)
- Supports Dolby Digital audio downmixing to 2-Channel Stereo audio
- Supports Dolby Digital sampling rate 48kHz
- Supports LPCM input sampling rates from 32 to 96 kHz
- Output sampling rate is adjusted to 48kHz
- Provides electromagnetic-noise-free transmission
- Supports simultaneous outputs for added signal management flexibility, where Digital outputs maintain the Dolby Digital signal

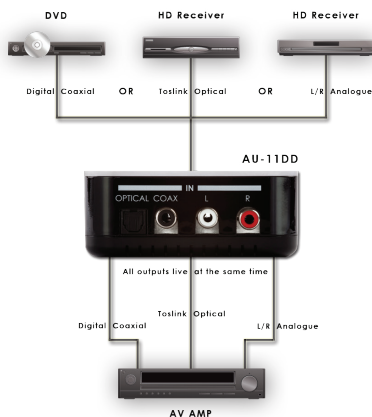

#### SPECIFICATIONS

Input:	2x RCA (1x Analogue Stereo (L/R)), 1x RCA (1x Coaxial Dolby Digital / 2 Channel LPCM), 1x Toslink (1x Optical Dolby Digital / 2 Channel LPCM)
Output:	2x RCA (1x Analogue Stereo (L/R)), 1x RCA (1x Coaxial Dolby Digital / 2 Channel LPCM), 1x Toslink (1x Optical Dolby Digital / 2 Channel LPCM)
Power:	5V/1.2A DC (US/EU standards, CE/FCC/UL certified)
Dimensions:	95mm (W) x 85mm (D) x 35mm (H)
Gross Weight:	360g
Net. Weight:	100g
Packaging:	Retail Packaged



Vertrieb / Distributor:

**VIDELCO** Europe GmbH – Professionelle Audio-, Video-, Medien-Technik  
 Fon: +49 (0)2102 / 86 39-00 • Fax: +49 (0)2102 / 86 39-17 • info@videlco.eu • www.videlco.eu

