
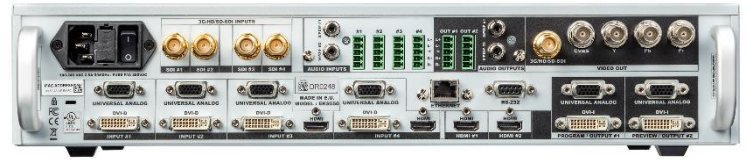


Multi-layer hi-resolution mixer & seamless switcher with ten inputs and three operating modes

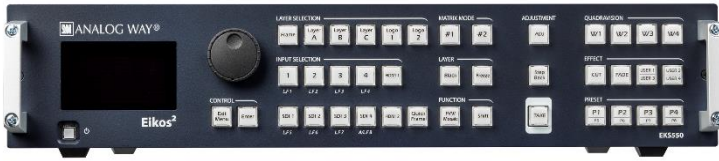


Flexibility and Versatile Connectivity

The **Eikos²** is a powerful multi-layer hi-resolution mixer and seamless presentation switcher featuring 10 seamless inputs and 16 input connectors (four HDMI, four DVI, four 3G-SDI and four universal analog). The **Eikos²** has two outputs with mirrored DVI and universal analog connectors that can be configured either as Preview & Program or as two independent program outputs. In addition, **Eikos²** features a Quadravision mode to display up to four layers on a still background. It also supports advanced audio inputs and outputs functionalities and includes 3G-SDI and analog outputs useable as video output or Program clone.

Quality without Compromise

Based on the extremely reliable and cost-effective MIDRA™ platform, the **Eikos²** offers ultra-low latency image processing, uncompromising video quality, true seamless switching and advanced video effects for elegant AV presentations, which makes it an ideal solution for live events, fixed installations, houses of worship and educational facilities.

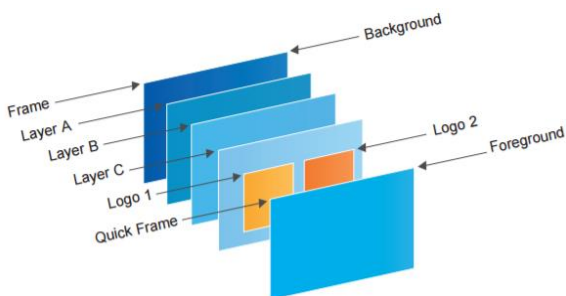


Smart functionalities

The **Eikos²** has been designed with innovative functionalities, including some advanced features inherited from the LiveCore™ series. The **Eikos²** can display up to three live layers (four in Quadravision mode), with background and foreground positions. Thanks to the new Quick Frame function, a foreground frame can quickly hide all other layers when necessary. To fit any display resolution, including non-standard formats like LED walls, the **Eikos²** manages custom output formats. Major new assets also include advanced management of audio to easily embed or de-embed digital audio on HDMI and DVI-D connectors, ensuring better processing and quality of the video and audio mix. For easy routing of audio signals, some functions such as Fast Routing and Audio Breakaway are available.

Powerful and Flexible Control Options

The **Eikos²** has been designed to be entirely operated from the easy-to-use front panel. Each MIDRA™ model can also be easily controlled using the intuitive drag & drop user software interface: the **RCS²**. The **Eikos²** offers IP (Ethernet) control via a standard TCP/IP socket connection and an RS-232 serial interface supported by all major third-party control systems. Additionally, the **Eikos²** can be controlled by a comprehensive range of remote control panel options such as the **RK-350** keypad or the **Shot Box²**.

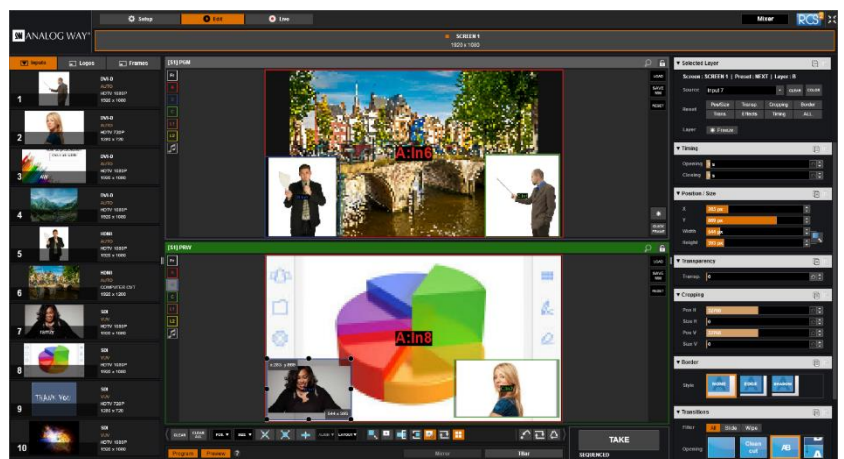

Eikos² at a glance

- ▶ Based on the MIDRA™ platform
- ▶ 3 modes: Seamless Mixer, Matrix & Quadravision
- ▶ Heavy-duty design for incredible reliability
- ▶ High quality, ultra-low latency video processing
- ▶ 3G-SDI inputs and outputs
- ▶ Advanced audio management
- ▶ User-friendly and intuitive graphic interface

	QVU150-3G	QMX150	PLS350-3G	SMX250	SPX450	EKS550
Operating modes	1	1	2	1	2	3
Inputs	8	8	8	10	10	10
Outputs	1 + 1 Preview	2	2	2	2	2
Video Output	1	0	1	1	1	1
Transitions & Effects	+	+	+	++	+	++
Live Layers (max)	1 + 1 keyed	1 + 1 keyed	2	2	3	4

KEY FEATURES

MIDRA™ platform: uncompromised processing and manufacturing quality

3 operating modes: Seamless Mixer, Native Matrix and Quadravision

10 seamless inputs

Capability to switch seamlessly between any inputs (16 input plugs available)

2 outputs: Program/Output#1 and Preview/Output#2

Mosaic Preview mode: Display a Mosaic Preview of all your inputs on the PREVIEW monitor

Video output: Digital SD/HD TV (3G-SDI) and Analog SD TV (CVBS, YPbPr)

High performance video processing:

- Very fast seamless switching
- Ultra-low latency processing
- Chroma/Luma Key and Titling
- Ability to modify the Program in real time without using the Preview
- Custom output formats
- Advanced de-interlacing processing
- New freeze features (input/layer/screen)

Advanced Audio Management:

- Embed/De-Embed audio on all plugs
- Breakaway Audio mode
- Top Layer mode
- Balanced Stereo audio on all outputs
- Fast Routing mode
- Delay compensation (manual up to 80ms or auto)

Enhanced Layer Processing:

- Up to 4 layers on Still Background
- Live layers fully resizable
- Pan & Zoom resizing up to 1000%
- Open/Close animation
- Dynamic layers (Moving from A to B) with Flying, Zooming or Cropping functions
- Border & Shadow
- Transitions: Fade, Cut, Wipe, Slide, Stretch, Depth, Circle & Flip

Quick Frame mode: Instantly display a stored frame above all layers

Internal test patterns: Select between 9 available test patterns

EDID Management: Management on 6 inputs; Ability to read & display outputs EDIDs

HDCP Compliant: Enable/Disable the HDCP (if the display is not compliant, the output image could be disabled)

Memories:

- 8 Memory Presets per output and up to 64 via RCS²
- 8 Full frames
- 8 logo Memories (including one animated Logo)

RCS²: Remote Control Software for Windows and Mac

Dimension (in Rack Units - RU)

- ▶ 2RU

Dimensions (without rack ears and rear rack mount)

- ▶ W 17.28" x H 3.46" x D 14.76"
- ▶ L 439.5 mm x H 88 mm x P 375 mm

Dimensions (with handles)

- ▶ W 19" x H 3.46" x D 15.75"
- ▶ L 482.1 mm x H 88 mm x P 400 mm

Weight without accessories

- ▶ 6.4 kg / 14.1 lbs

Shipping weight accessories included

- ▶ 8.9 kg / 19.62 lbs

Operating conditions

- ▶ Temperature: 0 to 40°C (32 to 104°F)
- ▶ Humidity: 10% to 80%, non-condensing

Thermal dissipation

- ▶ 239 BTU/hr

Noise (@1,6m height @25°C)

- ▶ Front: 39 DBa@1m
- ▶ Rear: 39 DBa@1m

Warranty

3-year warranty on parts and labor back to factory

Power Supply

- ▶ 100-240 VAC 50/60Hz 2,5A
- ▶ Fuse cartridge F4AH 250VAC 5x20mm
- ▶ Max consumption: 70 W

Safety Compliance

- ▶ IEC/UL/EN 60950-1, CSA22.2#60950-1, ETL Listed (US & Canada)

Supplied with

- ▶ 1 x Power supply cord
- ▶ 1 x Pair of front handles + screws
- ▶ 1 x Ethernet cross cable (for device control)
- ▶ 6 x MCO 5 pin connector
- ▶ 1 x Quick Start Guide including safety instructions*

INPUTS

10 seamless inputs, 16 total input plugs

4 x DVI-D up to 2048x1152@60Hz

4 x HDMI up to 2048x1152@60Hz

4 x Universal Analog up to 2048x1152@60Hz

4 x 3G/HD/SD-SDI up to 2K@60Hz

OUTPUTS

2 outputs with 2 plugs per output

2 x DVI up to 2048x1152@60Hz

2 x Universal Analog up to 2048x1152@60Hz

1 x 3G-SDI up to 2K@60Hz, useable as video output or program clone

4 x BNC for Analog SD TV (CVBS, YPbPr) up to 625/576i

AUDIO

5-pin MCO connectors: 4 for analog audio inputs and 2 for analog audio outputs

4 RCA connectors: 2 for S/PDIF audio inputs and 2 for S/PDIF audio outputs

Input:

DVI (as HDMI) / HDMI / SDI Audio de-embedded

4 x Audio stereo Analog (Balanced/Unbalanced)

2 x S/PDIF (AES-3id compatible)

Output:

DVI (as HDMI) / SDI Audio embedded

2 x Audio stereo Analog (Balanced/Unbalanced)

2 x S/PDIF (AES-3id compatible)

STANDARDS

SMPTE: ST 259:2008, ST 260:1999, ST 274:2008, ST 292-1:2012, ST 296:2012, ST 424:2012, ST 428-19:2010

VESA: GTF1.1, CVT 1.1, DMT1.0 rev.12

OPERATING MODES

Mixer mode:

Seamless switching with full preview with 1 layer

1 Title on Live Background

Up to 2 Layers on Live Background

Up to 3 Layers on Still Background

Matrix mode:

Seamless switching

1 Title on Live Background on each output

1 Layer on Live Background on each output

Up to 2 Layers on Still Background on each output

Quadravision:

Seamless switching

Up to 4 Layers on still Background

CONTROL

Full-featured Front Panel

RCS²: Remote Control Software with intuitive GUI

Orchestra²: Intuitive and ergonomic Controller

RK-350: Remote Keypad

SB80-2: Shot Box²

AMX/Crestron drivers

OTHER FEATURES

DB9: RS232 for remote control

RJ45: Ethernet connection

*All technical specifications and videos are available on

www.analogway.com

 Specifications subject to change without prior notice

EKS550-EN-04/30/2018

Distributor / Vertrieb:

Ein Vertriebsprodukt von / Distributed by:

VIDELCO Europe GmbH – Professionelle Audio-, Video-, Medien-Technik

Telefon: +49 (0)2102 / 86 39-00 • Fax: +49 (0)2102 / 86 39-17 • info@videlco.eu • www.videlco.eu