

# IQS4

4K Quad Splitter

**DATAPATH**  
EXCELLENCE BY DESIGN



## SINGLE 4K INPUT, FOUR HD OUTPUT VIDEO SPLITTER

IQS4 is Datapath's 4K splitter solution engineered specifically for large, multi-output video wall applications. Paired with Datapath's Image4K graphics cards, the IQS4 delivers a cost-effective solution for powering video walls of up to 96 HD screens.

## FEATURES

- **Zero-Configuration:** Works with Datapath Image4K and Image2K graphics cards with no configuration needed.
- **Easy Setup & Management:** Splitting and placement of 'quadrants' is easy with the graphical setup wizard.
- **High Quality Content Support:** 4K60 HDMI 2.0 input with support for HDCP 2.2.
- **Zero-Latency:** Splits and routes the input signal to all four outputs with a maximum delay of a single line.
- **Multiple Mounting Options:**
  - 4U rack mount kit supports up to eight IQS4 units with RPSU
  - 1U rack mount kit to house two IQS4 units with RPSU
  - VESA compliant for mounting single IQS4 units behind screens
  - Standalone - place units on desks, workstations, or any flat surface.
- **Reduce Cabling Requirements:** Distribute video in 4K and split local to screens to reduce long distance cabling requirements.

Engineering the **world's best** visual solutions

Ein Vertriebsprodukt von / Distributed by:

**VIDELCO** Europe GmbH – Professionelle Audio-, Video-, Medien-Technik

Telefon: +49 (0)2102 / 86 39-00 • Fax: +49 (0)2102 / 86 39-17 • [info@videlco.eu](mailto:info@videlco.eu) • [www.videlco.eu](http://www.videlco.eu)

  
**VIDELCO**  
Europe GmbH

# 4K Quad Splitter

## STREAMLINE SYSTEM CAPACITY

By taking a single 4K input and splitting it into four HD outputs, using IQS4 units reduces the overall number of graphics cards needed in the video wall controller, which streamlines the system, reducing load and optimising capacity.

## SIMPLIFIED VIDEO DISTRIBUTION

IQS4 gives integrators the option to distribute video in 4K and split the signals at the video wall rather than having to use separate extenders for each HD output.

## INSTALL ANYWHERE


Mounting flexibility means the IQS4 can be used for any application. When installed with a video wall or screen, each IQS4 unit can be VESA mounted directly behind displays. Where IQS4 units are hosted with the video wall controller, various rack mount options are available depending on the number of IQS4 units required. There is also a standalone option for direct installation on workstations or any flat surface.

## MODELS AVAILABLE


Order code: IQS4

## FLEXIBLE MOUNTING OPTIONS

Install at the wall

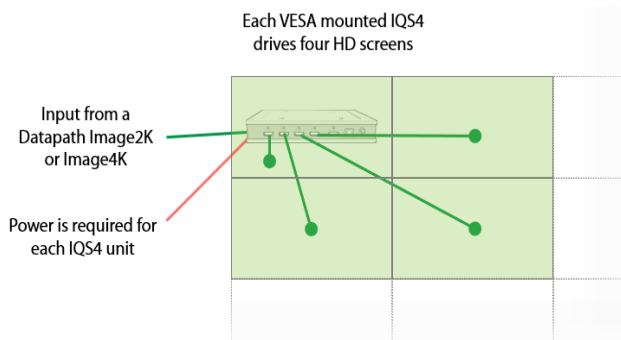

Rack mount

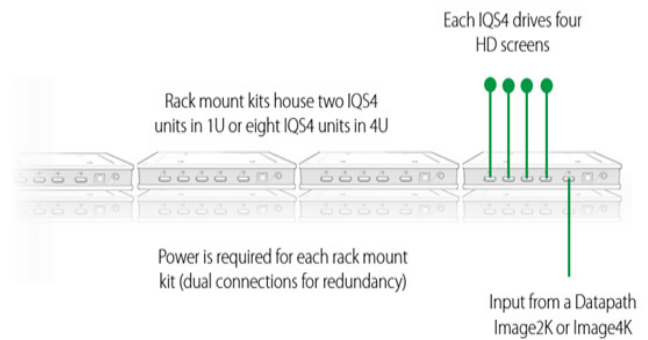

## SPECIFICATION

### VIDEO OUTPUT CONNECTIONS

4 x HDMI 1.4 (1920x1080@60)

### VIDEO INPUT CONNECTION

1 x HDMI 2.0 (7680x1080@60)

### POWER REQUIREMENTS

12W

### OPERATING TEMPERATURE

0 °C to 35 °C / 32 °F to 96 °F

### STORAGE

-20 °C to 70 °C / -4 °F to 158 °F

### RELATIVE HUMIDITY

5%-90% non-condensing

### SIZE

205mm (l) x 161mm (w) x 31mm (h)

### WARRANTY

3-year standard, 5-year extended (optional)

**DATAPATH**  
EXCELLENCE BY DESIGN

Ein Vertriebsprodukt von / Distributed by:

**VIDELCO** Europe GmbH – Professionelle Audio-, Video-, Medien-Technik  
Telefon: +49 (0)2102 / 86 39-00 • Fax: +49 (0)2102 / 86 39-17 • [info@videlco.eu](mailto:info@videlco.eu) • [www.videlco.eu](http://www.videlco.eu)

**VIDELCO**  
Europe GmbH