

PDU-1209



Power Distribution Unit for IP-NINJAR

The PDU-1209 is a power distribution unit that provides power for up to 9 compatible model devices (NJR-01UHD, NJR-04HD, and NJR-CTB). The PDU-1209 has overcurrent protection. If the PDU-1209 detects a power failure or a fan failure, the appropriate front panel LED is illuminated and the PDU-1209 outputs a warning alarm.

FRONT & REAR PANEL



FEATURES

Power supply

- Power distribution for IP-NINJAR products
- Up to 9 independent 12 VDC and 3.3 A simultaneous outputs
- Overcurrent protection

Others

- Alarm (in case of excessive DC output current or cooling fan malfunction)
- DC cable with locking connector

SPECIFICATION

Item	Description
DC power Output	Number / Signal 9 outputs / 12 VDC, 3.3 A (designated DC cables are provide)
	Connector 9 female DIN (4-pin)
Function	Overcurrent protection
Alarm output	Number / Signal 1 port / signal for letting know abnormality of DC output and fan
	Connector 1 terminal block (2-pin)
Others	Input power AC ~ 100V-240V± 10%, 50 Hz / 60 Hz ± 3 Hz
	Power consumption About 423 Watts
	Dimensions 8.27 x 1.73 x 9.84"/ 210 (W) x 44 (H) x 250 (D) mm (EIA rack 1/2U size, not including projections)
	Weight About 4.85 lbs. / 2.2 kg
	Temperature Operating: 32 °F to 104 °F / 0 °C to +40 °C Storage: -4 °F to +176 °F / -20 °C to +80 °C
Humidity	Operating / Storage humidity: 20% to 90% (Non Condensing)

SUPPORTED PRODUCTS

Products Name	Parts Number
IP-NINJAR products	NJR-01UHD, NJR-04HD, and NJR-CTB
Other IDK products	MSD-402, HDC-TH200

Ver.1.0.0 (170728)

Ein Vertriebsprodukt von / Distributed by:

VIDELCO Europe GmbH – Professionelle Audio-, Video-, Medien-Technik
Telefon: +49 (0)2102 / 86 39-00 • Fax: +49 (0)2102 / 86 39-17 • info@videlco.eu • www.videlco.eu




PDU-1209

APPLICATION EXAMPLE



Connecting PDU-1209 to IP-NINJAR products

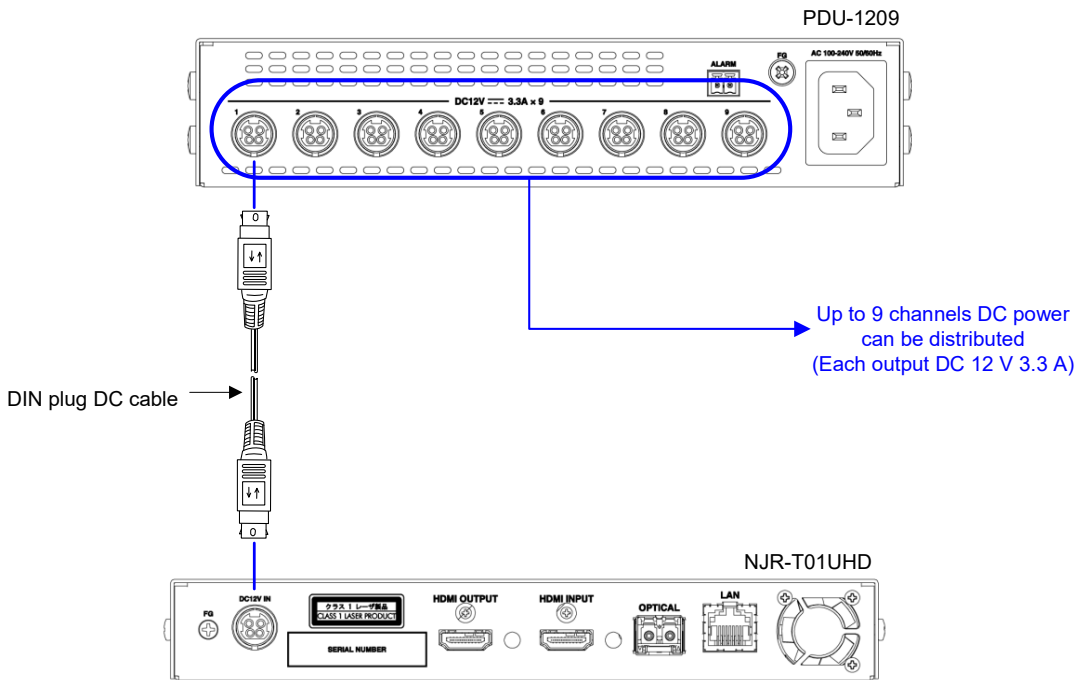

SAMPLE CONFIGURATION

Placing PDU-1209 in an EIA rack-mount unit

