

HDMI to HDMI Scaler with Audio Embedding & De-Embedding




The SY-300H will allow a HDMI source signal to be scaled up or down to a variety of different resolutions selectable via the OSD (On Screen Display). When set to 'native' mode, the scaler will automatically scale the HDMI input signal to the native resolution of the connected screen. This device also provides 50/60Hz frame rate conversion further enhancing compatibility with AV sources and displays.

In addition, the SY-300H includes integrated audio embedding and de embedding using the Toslink and 3.5mm jack inputs and outputs.

FEATURES

- HDMI, HDCP and DVI compliant
- Full range of resolutions supported PC from VGA - WUXGA (RB) and HD resolutions from 480i - 1080p
- Output resolution can be set to native, which automatically scales the output to the resolution of the connected display
- Features 50/60Hz frame rate conversion
- Supports 3-D motion video adaptive, 3-D de-interlacing, and 3:2/2:2 pull-down detection and recovery
- Provides output picture adjustment on contrast, brightness, hue, saturation, sharpness, RGB (colour tone) level and aspect ratio size
- Supported audio HDMI and Toslink: Dolby Digital, DTS, LPCM 5.1 and LPCM 2.0
- Supported audio 3.5mm Jack: Analogue stereo audio

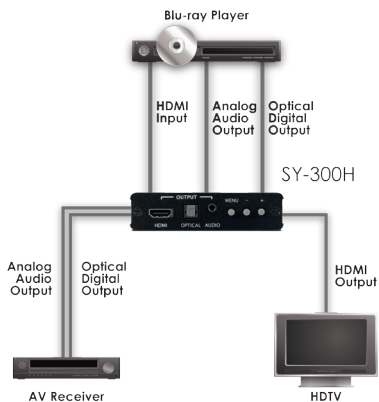

SPECIFICATIONS

Input:	1x HDMI [1x Uncompressed AV and Data], 1x Toslink [1x 2 Channel LPCM / Dolby Digital / DTS], 1x USB Type A [1x Service Port Propriety Data], 1x 3.5mm Stereo mini-jack [1x Analogue Stereo(L/R)]
Output:	1x HDMI [1x Uncompressed AV and Data], 1x Toslink [1x 2 Channel LPCM / Dolby Digital / DTS], 1x 3.5mm Stereo mini-jack [1x Analogue Stereo(L/R)]
Power:	5V/2.6A DC (US/EU standards, CE/ FCC/UL certified)
Dimensions:	100mm [W] x 150mm [D] x 25mm [H]
Gross Weight:	600g
Net. Weight:	340g

Vertrieb / Distributor:

VIDELCO Europe GmbH – Professionelle Audio-, Video-, Medien-Technik
 Fon: +49 (0)2102 / 86 39-00 • Fax: +49 (0)2102 / 86 39-17 • info@videlco.eu • www.videlco.eu

