

VisionSC-HD4+

Professional audio and video capture card



HIGH PERFORMANCE CARD

A wide range of applications demand multiple channels of video capture from a single card. Markets include advanced medical, defence and security applications. Suitable for these markets and others, Datapath's VisionSC-HD4+ audio video capture card provides an outstanding, powerful solution for multiple HDMI or DVI video capture with support for HDCP*.

QUAD HDMI VIDEO CAPTURE

The VisionSC-HD4+ has four onboard HDMI 1.4 video capture channels; two channels supporting 3840 x 2160 at 60fps and two channels offering support for 1920 x 1080 at 60fps. All four channels are capable of operating independently of each other, enabling four separate 4 video sources to be captured and controlled simultaneously. The card also has embedded audio support across all four channels. The VisionSC-HD4+ is shipped with adapter cables for either HDMI or DVI.

Engineering the **world's best** visual solutions


DATAPATH
EXCELLENCE BY DESIGN

Ein Vertriebsprodukt von / Distributed by:

VIDELCO Europe GmbH – Professionelle Audio-, Video-, Medien-Technik

Telefon: +49 (0)2102 / 86 39-00 • Fax: +49 (0)2102 / 86 39-17 • info@videlco.eu • www.videlco.eu


VIDELCO
Europe GmbH

Advanced graphics display

VISION PERFORMANCE FEATURES

The VisionSC-HD4+ is supplied with the Datapath Vision Performance Driver. Combining both Hardware and Software enhancements the Vision Performance Driver provides users with a variety of features to help them achieve their goals.

Features include LiveStream:Capture, low latency capture solution, MultiStream allowing for the independent control of multiple instances of a single capture, a hardware based time stamping facility, automatic signal detection and more.

VIDEO STREAMING

For streaming applications, the VisionSC-HD4+ can be used with Windows Media Encoder to compress and stream captured video. To replay the video, use Windows® Media Player.

Any application compatible with Windows® DirectShow technology can use the VisionSC-HDMI4 due to its built-in WDM support.



COMPATIBILITY


The VisionSC-HD4+ is supported by the following operating systems: Linux, Windows® XP, Windows Vista, Windows Server 2003, Windows Server 2008, Windows 7, Windows 8/8.1 and Windows 10.

Datapath SDK is included for software developers.

MODELS AVAILABLE

Order Code: VisionSC-HD4+/H
Capture card with 2 x HDMI splitter cables

Order Code: VisionSC-HD4+/D
Capture card with 2 x DVI splitter cables

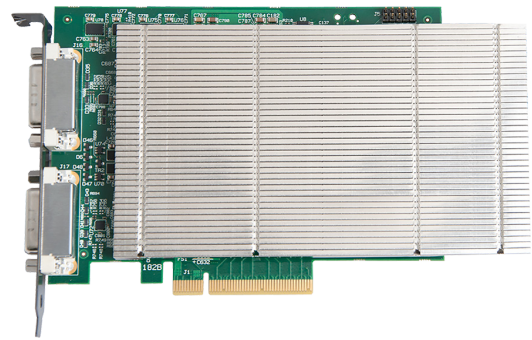

SPECIFICATION

BOARD FORMAT

PCIe x8 plug-in card

DIMENSIONS

110mm x 177mm (inc. heat sink)

CONNECTORS ADAPTERS

2 x DSM-59 connectors plus
(see below for options)

UPDATE RATE

Channels 1 & 3 - 297 MP/s
Channels 2 & 4 - 165 MP/s

MAX CAPTURE RESOLUTION

Channels 1 & 3 2 x 3840 x 2160p
at 60Hz
Channels 2 & 4 2 x 1920 x 1080p
at 60Hz

FRAME BUFFER

768MB

PIXEL TRANSFER FORMATS

RGB: 5-5-5, 5-6-5 or 8-8-8
(24bit/32bit) YUV: 4:2:2
MONO: 8bit

VIDEO MODES

HDMI 1.4, HDMI 1.3, DVI

POWER REQUIREMENTS

Max current at +3.3 - 0.45A. Max
current at +12V - 0.85A Max
power ≈ 18W

OPERATING TEMPERATURE

0 °C to 35 °C / 32 °F to 96 °F

STORAGE TEMPERATURE

-20 °C to 70 °C / -4 °F to 158 °F

RELATIVE HUMIDITY

5% to 90% non-condensing

WARRANTY

3 years

*HDCP support requires the use of a Datapath Graphics Card.

All products are shipped with the latest software available, unless stated otherwise. Special requirements may be organised by contacting our Sales team.

DATAPATH
EXCELLENCE BY DESIGN

Ein Vertriebsprodukt von / Distributed by:

VIDELCO Europe GmbH – Professionelle Audio-, Video-, Medien-Technik
Telefon: +49 (0)2102 / 86 39-00 • Fax: +49 (0)2102 / 86 39-17 • info@videlco.eu • www.videlco.eu

VIDELCO
Europe GmbH