

PU-1H3HBTE 1 HDMI to 3 HDBaseT™ Splitter

1 HDMI to 3 HDBaseT™ Splitter (100m) including additional HDMI output



USE WITH PU-507RX/
PU-507WPRX FOR PoE

5Play™

The PU-1H3HBTE enables a single HDMI source input to be distributed to 3 HDBaseT™ outputs. The HDBaseT™ outputs allow uncompressed distribution of HDMI, LAN, PoE, and IR over a Single CAT5e/6/7 cable up to lengths of 100m. Perfect for both residential and commercial AV installations, the PU-1H3HBTE can distribute HDMI signals to 3 displays. The product also includes an additional HDMI output for increased flexibility and can also be cascaded up to 5 times to allow distribution to potentially 50 screens or more.


The PU-507RX or PU-507WPRX Receivers are recommended to utilise the functionality of the HDBaseT™ outputs of this device.

FEATURES

- Supports all v1.4 HDMI resolutions including 4k.
- HDMI, HDCP, & DVI compliant
- Supports HDMI / LAN / PoE (Power over Ethernet) / IR
- Common supported resolutions : HDTV: 480p, 576p, 720p, 1080i, 1080p, 1080p24, 4K2K; PC: VGA, SVGA, XGA, WXGA, SXGA, UXGA, WUXGA.
- Supports uncompressed video/audio up to 10.2Gbps
- Supports HDCP repeating and CEC functions
- Additional HDMI bypass output provided to improve flexibility
- Uncompressed data transfer over single CAT cable (100m - CAT6/7; 80m - CAT5e)
- Audio support up to 7.1CH & Dolby TrueHD, DTS-HD
- Supports 3D signals

SPECIFICATIONS

Inputs	1x HDMI [1x HDMI Uncompressed AV and Data] 1x 3.5mm Stereo mini-jack [1x Infra Red Receiver] 1x RJ45 [1x LAN Servng]
Outputs	1x HDMI [1x HDMI Uncompressed AV and Data] 3x RJ45 [3x HDMI & Propriety Data] 1x 3.5mm Stereo mini-jack [1x Infra Red Emitter]
PSU:	24V/4.16A
Dimensions	145mm [W] x 200mm [D] x 30mm [H]
Net Weight	580g
Gross Weight	720g

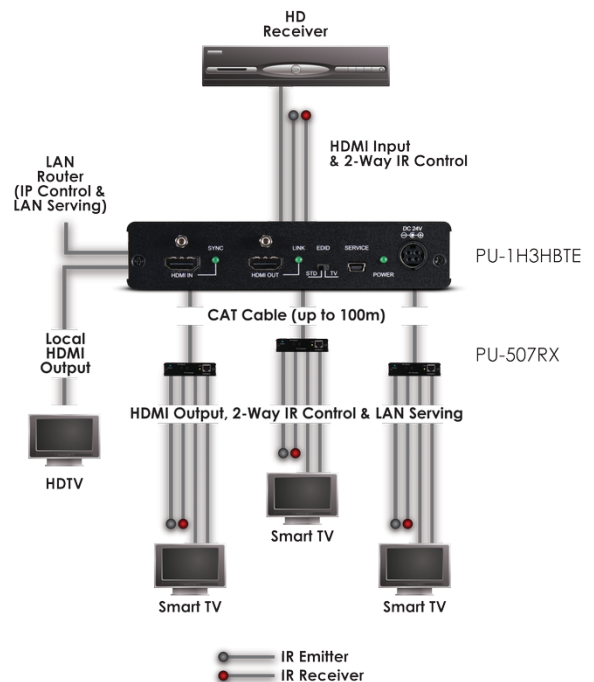

2013-08

Ein Vertriebsprodukt von / Distributed by:

VIDELCO – Professionelle Audio-, Video-, Medien-Technik!

Telefon: +49 (0)2102 / 86 39-00 • Fax: +49 (0)2102 / 86 39-17 • info@videlco.eu • www.videlco.eu

