



www.CYPEUROPE.com

WWW.CYPEUROPE.com

Click to go to the index screen for residential solutions



A brief introduction into what this guide is all about!

MEETING ROOM 04 MEETING RC

> Meeting room floor plan showing the PUV-1650 range with a CR-TG1.

06 MEETING ROOM SOLUTION 2

A simple room solution showing the PUV-1610TX and 1650RX.

MEETING ROOM **SOLUTION 3** 

Second version for this simple room solution using the PUV-1620S-TX and PUV-1610RX.

MEETING ROOM **SOLUTION 4** 

This solution is showing the PUV-1602TXWP.

**HUDDLE ROOM** 

Huddle room solution that is flexible for the modern meeting space. Showcasing the PUV-1630TTX.

**ENDEAVOUR ROOM SOLUTION 1** 

> Endeavour meeting room solution that incorporate three main products CR-TG1, PUV-1650TX and the PUV-1610RX.

**ENDEAVOUR ROOM SOLUTION 2** 

> Endeavour meeting room solution 2 that incorporate two main products PUV-1650TX and PUV-1610RX.

**ENDEAVOUR ROOM SOLUTION 3** 

> Endeavour meeting room solution 3 that incorporate two main products PUV-1650TX and PUV-1650RX.

20 DIGITAL SIGNAGE SOLUTION

Digital signage solution showing the PUV-1H4HPL-AVLC, PUV-1730PLRX-AVLC and the AU-A50

22 HOSPITALITY IP SYSTEM SOLUTION

UNIVERSITY IP SYSTEM LAYOUT

33 IP System solution showing

and the CR-TGI

off the IP 7000TX, IP-

7000RX, IP-CS7, EL-7300

Hotel conference room solution showing the IP 7000TX, IP-7000RX and IP-CS7 products.

IP MATRIX SIGNAGE SOLUTION

Retail signage solution showing the IP 7000TX, IP-7000RX and IP-CS7 products.

26 IP: 'ONE TO MANY'
SYSTEM SOLUTION SYSTEM SOLUTION

> IP signage solution showing one IP-7000TX to many IP-7000RX

28 IP LEISURE/BAR MATRIX SYSTEM SOLUTION

SOLUTION

Digital signage solution

4K22 and the DS-VWC

layout showing the QU-4-

IP solution for leisure/bar including the IP-7000RX, IP-7000TX and IP-CS7 within a RAX-600

30 UNIVERSITY ROOM SYSTEM SOLUTION

University IP room solution incorporating the PUV-1630TTX, CR-TG1, IP-CS7, EL-42PIP. PUV-1610RX. IP-7000TX, IP-7000RX and the RAX 300/600

School room solution utilising the AU-A220, PUV-2010TX and the PUV-2010RXWP for USB integration

36 LECTURE ROOM SYSTEM LAYOUT

> Lecture room system layout using the products PU-515PL-RX, EL-5400-HBT and the AU-A220

DIGITAL SIGNAGE

40 FIBER OPERATIONS ROOM SOLUTION

Fiber operations room solution showing the SDV-FTRX and the SDV-CS8

# Introduction

No two workspaces are the same, yet with some careful planning and the right mixture of technology, both fixed and flexible solutions for all audio/visual requirements in the workplace are readily available.

Our new PUV-1600 Series of extenders and switchers now offers the corporate sector the widest range of features across a vast range of applications. Whether it is breaking out the audio, combining and displaying 4K UHD video streams for presentations or offering local or global connectivity for visitors, any combination is available and easily controlled.

For those looking to use existing networks within an office space, our latest IP-7000 Series IP extenders, switchers and controllers offer both easy connectivity and control across a wide range of functions.

Take a look through our solutions brochure, which includes both real-world and possible applications. We hope that it will inspire your designs and help you realise that no matter what your client requires, with CYP, you are able to deliver.

"It's not about ideas, it's about making ideas happen"


Scott Belsky

NEXT PAGE 4

PREVIOUS PAGE

# Meeting Room Solution 1

04 PREVIOUS PAGE

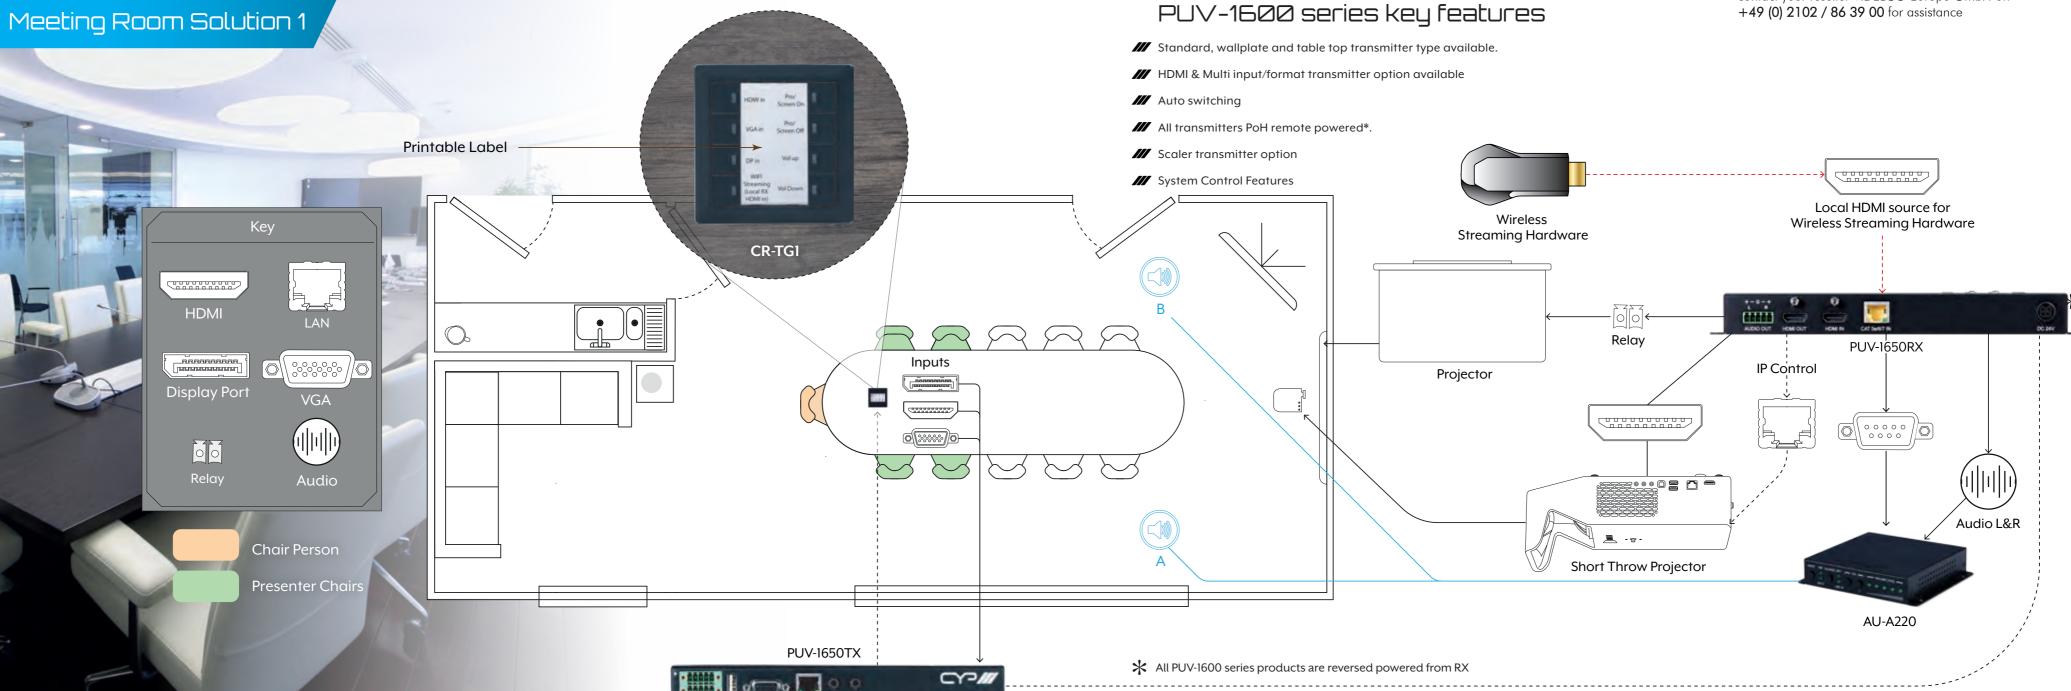



### Benefits

- **III** Extend AV signals over CAT up-to 100M
- Mountable TX/RX
- Local HDMI input on RX
- **///** 2 x Control Relay on RX
- PoH Powered TX\*
- De-embedded audio output from RX




PUV-1610TX **HDMI** Transmitter



PUV-1650RX Powered RX with HDMI output & Local HDMI input






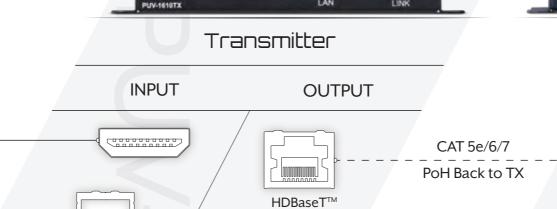


Wireless Streaming Device



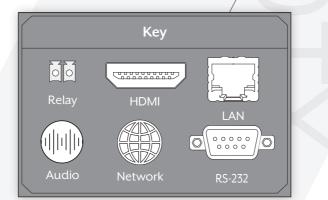

\* All PUV-1600 series products are reversed powered from RX

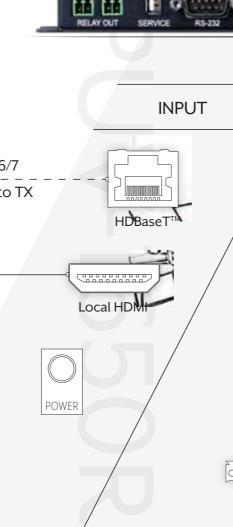






















000000000














IP Control



# Meeting Room Solution 3

# Benefits

- Extend AV Signals over CAT5e/6/7 up-to 100M
- Mountable TX/RX/Rax Compatible 300/600
- PoH Powered TX\*
- **///** Scaling TX
- Auto Switching TX
- /// Multiple Input TX

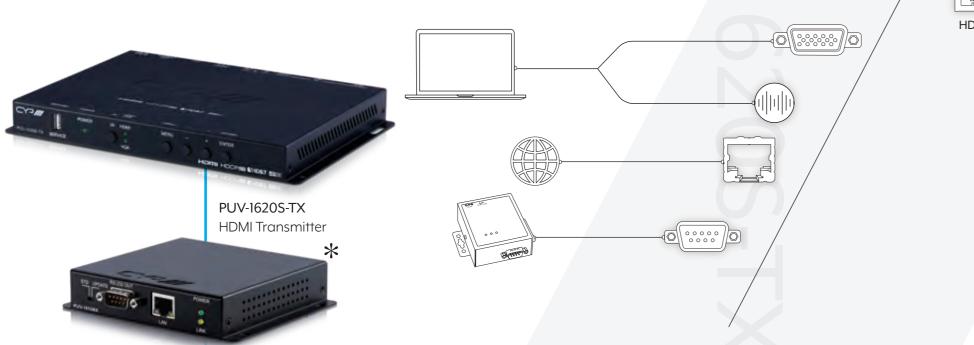





INPUT OUTPUT 0000000000 

HDBaseT™


If you can't find the solution you're looking for contact your reseller VIDELCO Europe GmbH on +49 (0) 2102 / 86 39 00 for assistance





# Receiver

OUTPUT INPUT




HDBaseT™





000000000

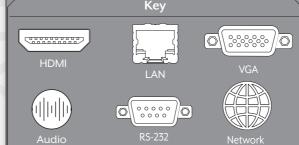

\* All PUV-1600 series products are reversed powered from RX



CAT 5e/6/7

PoH Back to TX

PUV-1610RX

Powered RX with HDMI output

#### If you can't find the solution you're looking for contact your reseller VIDELCO Europe GmbH on +49 (0) 2102 / 86 39 00 for assistance



#### Benefits

- **III** Extend AV signals over CAT5e/6/7 up-to 100M
- **///** 2-Gang wall plate TX
- PoH Powered TX\*
- Optional scaling wall plate TX
- Auto switching TX
- **///** Mountable RX
- ## HDMI & VGA plus audio input




PUV-1630TXWP-EU 2 x HDMI, 1 x VGA over Single CAT5e/6/7 HDBaseT™ Wall plate (EU) Transmitter (Single LAN up to 100m, PoH)




PUV-1602-TXWP HDMI & VGA Wall Plate TX / PUV-1605S-TXWP (Alternative Scaling Wall Plate TX) Scaling HDMI & VGA Wall Plate TX





Powered RX With HDMI Output

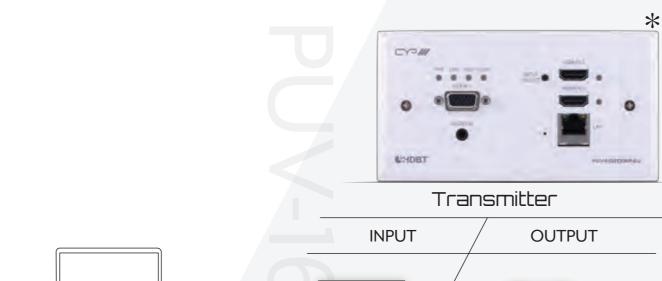

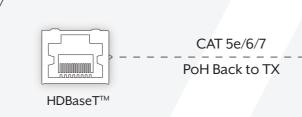

**POWER** 

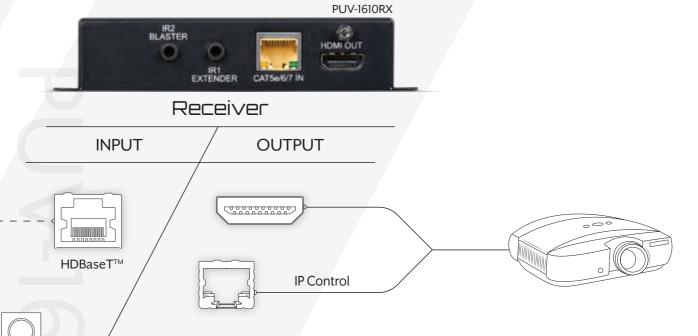

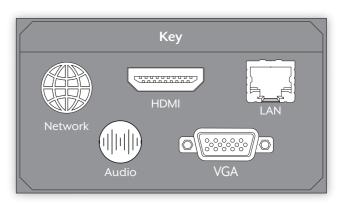

\* All PUV-1600 series products are reversed powered from RX

# Huddle Room System Solution


Flexible Presentation Solutions for the Modern Meeting Space.

#### **Benefits**

- Table Top Transmitter for flexible positioning within the meeting/huddle space
- Auto input switching
- **III** CEC/RS-232/Telnet commands for simple, basic automation (screen on/off) and display input select



PUV-1630TTX Also available CMD 'Reveal' box




\* All PUV-1600 series products are reversed powered from RX



If you can't find the solution you're looking for contact your reseller VIDELCO Europe GmbH on +49 (0) 2102 / 86 39 00 for assistance


# Example 1

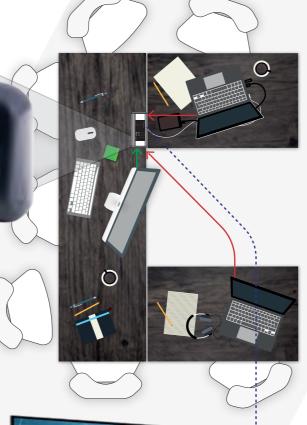



PUV-1610RX \*Any PUV-1600 Receiver

# Example 2

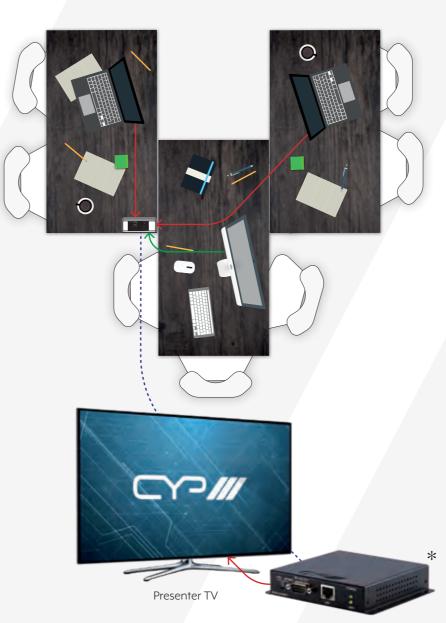












PUV-1610RX \*Any PUV-1600 Receiver





# Endeavour Room Solution 1

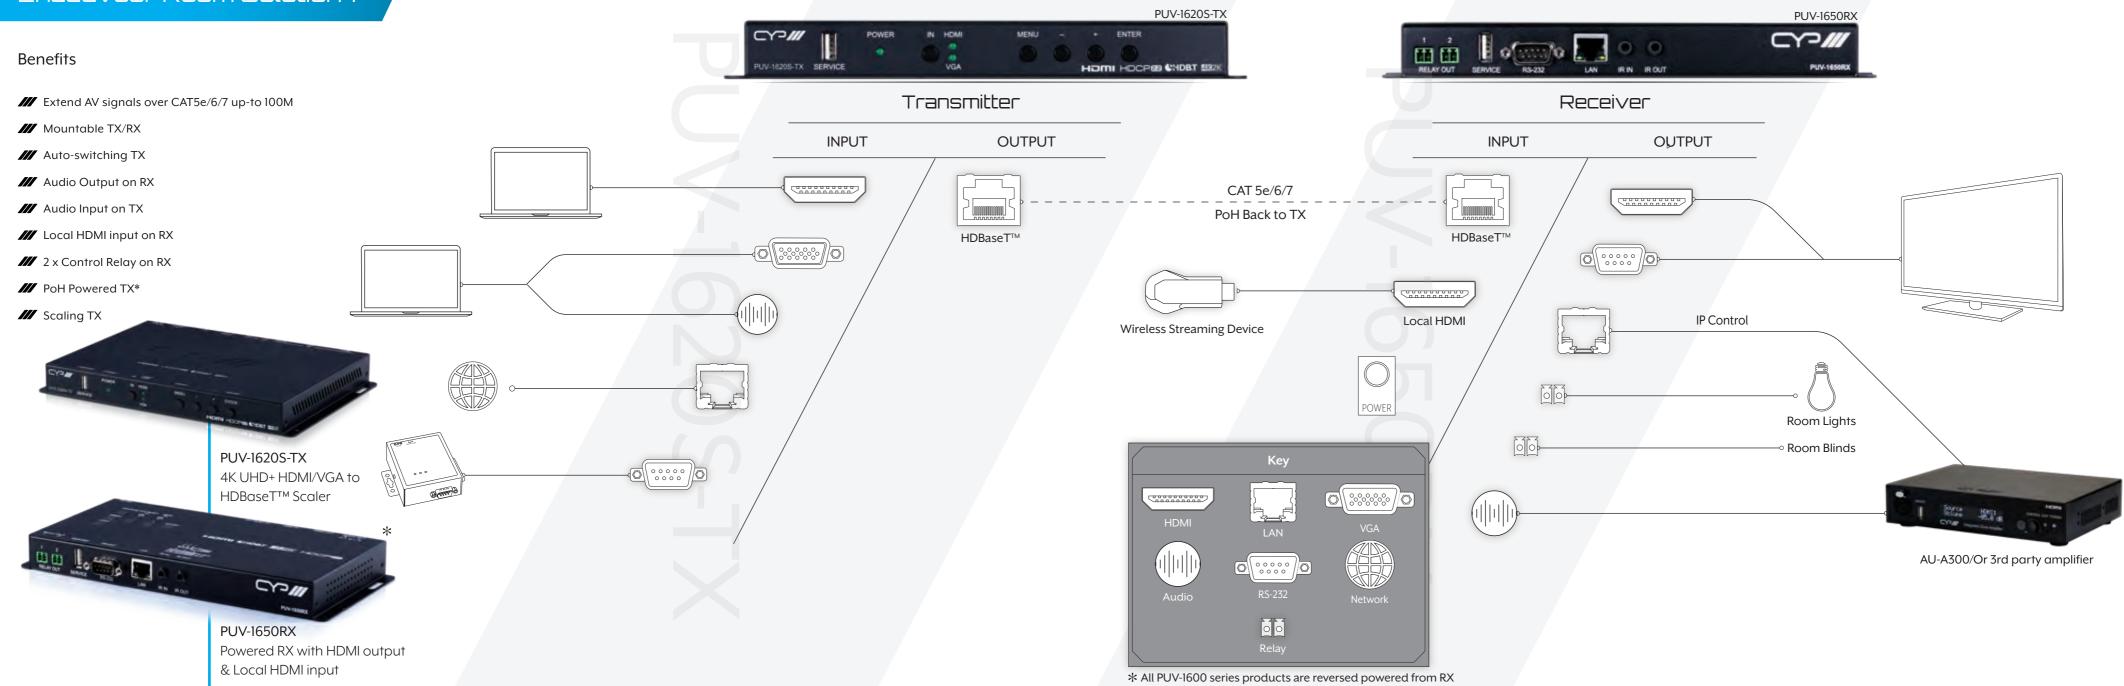

# Endeavour Room Solution 2


# **Benefits**

- Local HDMI output on TX
- Extend AV signals over CAT5e/6/7 up-to 100M
- Direct trigger input on TX
- Auto-switching TX
- PoH Powered TX\*
- Mountable TX/RX
- III In built control system
- **III** Multi format inputs






CR-TGI

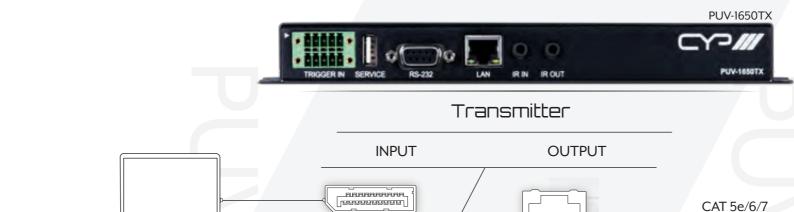


000000000

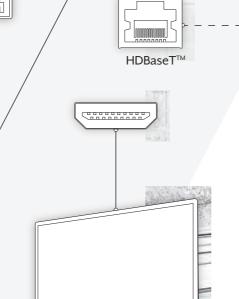


PoH Back to TX





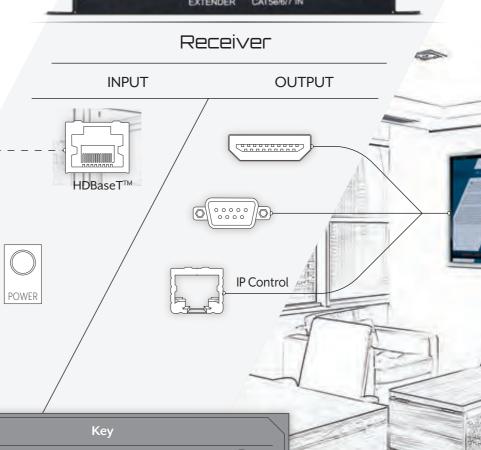

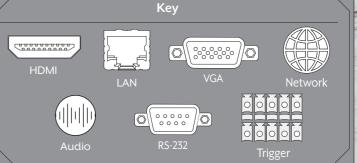

\* All PUV-1600 series products are reversed powered from RX

# Endeavour Room Solution 3





000000000

IP Control





- Extend AV signals over CAT5e/6/7 up-to 100M
- Direct trigger input on TX
- **///** 3-Way auto-switching TX
- Local HDMI Output on TX
- Audio Output on RX
- Local HDMI Input on RX
- **III** 2 x Control Relay on RX
- PoH Powered TX\*
- Mountable TX/RX
- **III** Scaling
- III In built control system
- **///** Multi input formats








Multi-Format HDBaseT Transmitter with HDMI, Display Port & VGA Inputs



PUV-1650RX

Powered RX with HDMI output & Local HDMI input

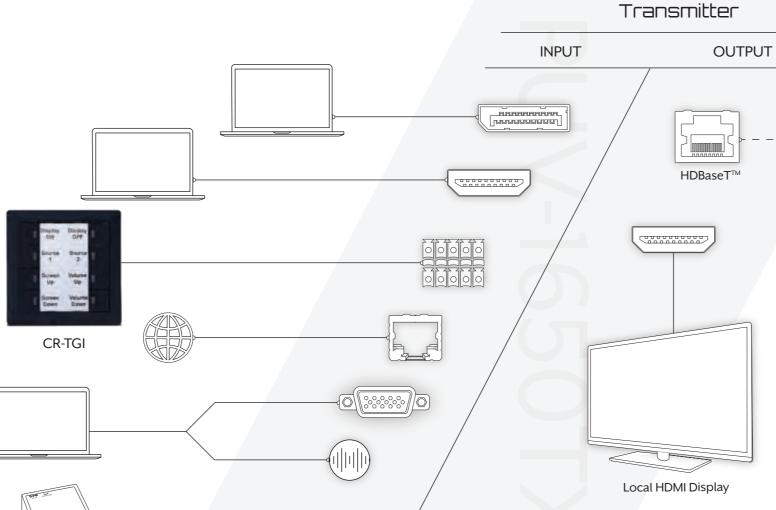





INPUT






Wireless Streaming Device

CAT 5e/6/7

PoH Back to RX


















If you can't find the solution you're looking for contact your reseller VIDELCO Europe GmbH on +49 (0) 2102 / 86 39 00 for assistance



Whinin.

AU-A300/Or 3rd party amplifier

- Digital Signage Solution
- Benefits
- Distribute full 18Gbps 4K signal over HDBaseT to multiple displays
- 4K HDR 10/12 bit (HDR and Dolby Vision) with AVLC (Adaptive Visually Lossless Compression)
- Local HDMI output for local display or extending the distribution system
- Balanced or unbalanced de-embedded audio output
- Two-way IR and RS-232 control



HOME CHOST BOOK HOOMS AND





Integrated 2-Channel Zone Amplifier (Audio Only)



PUV-1730PLRX-AVLC 70m HDBaseT™ HDR (6G) Receiver (4K, HDCP2.2, PoH, 18GBPS. OAR)










C000000000




POWER







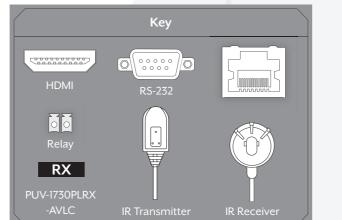


Local Display or extend distribution system with another PUV-1H4HPL-AVLC

x4 - CAT 5e/6/7

If you can't find the solution you're looking for contact your reseller VIDELCO Europe GmbH on +49 (0) 2102 / 86 39 00 for assistance



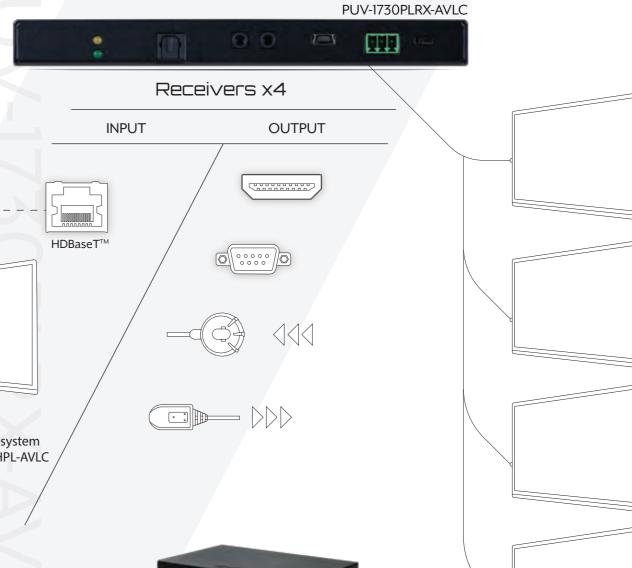




AU-A50/Or 3rd party amplifier

# Hospitality IP System Solution

#### **Benefits**


- Drag & Drop Control System via WebGui
- Simple Wizard Control Setup
- Audio Input/output
- PoE TX & RX's Groups & Presets
- **III** PoE Power options
- **///** Two way IR

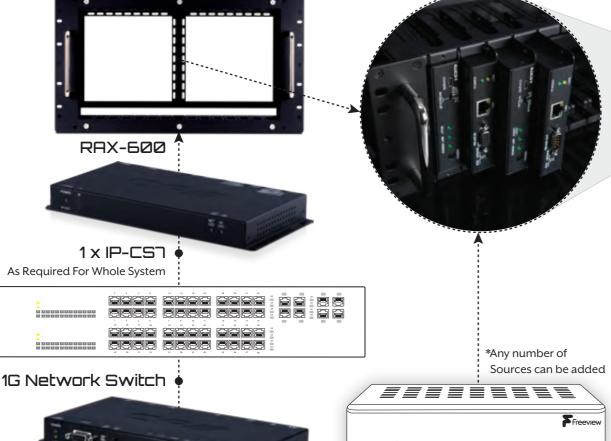

# 1 x 48 Port 1G Network Switch





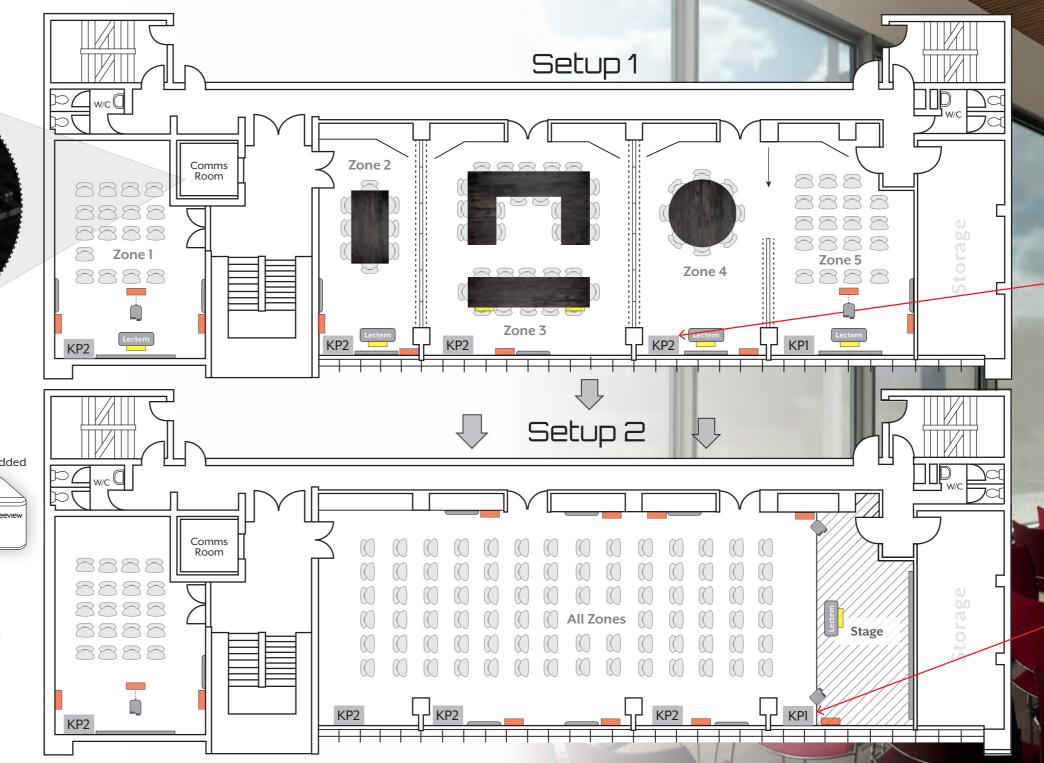





KP2

Bystom Cdf Sandto




Or 3rd party solution

# IP Matrix Signage Solution

## Benefits

- **III** PoE Power options
- **///** Two way IR
- Simple wizard setup procedure
- Trigger input for control
- Drag and drop WebGUI control
- Groups and preset configuration
- Flexible and scalable IP System
- Audio Input/output
- **///** USB Connectivity
- Cascadable RX's

If you can't find the solution you're looking for contact your reseller VIDELCO Europe GmbH on +49 (0) 2102 / 86 39 00 for assistance







# IP: 'One to Many' System Solution

### **Benefits**

- Flexible and scalable IP System
- **III** VGA and HDMI inputs
- Audio Input/output
- III IP-7000 Cascadable distribution system
- III Single source to any number of displays without network switch
- Star configuration



Digital Signage Player Each RX is delivering the source to a display.



IP-7000TX




























If you can't find the solution you're looking for contact your reseller VIDELCO Europe GmbH on +49 (0) 2102 / 86 39 00 for assistance


# IP Leisure/Bar Matrix System Solution

#### **Benefits**

- Direct connection to IP-CS7 from touch screen display
- **III** Drag & drop user control
- Wizard setup
- Groups and preset configuration
- Flexible and scalable IP System
- PoE Power options
- **///** Two way IR


If you can't find the solution you're looking for contact your reseller VIDELCO Europe GmbH on +49 (0) 2102 / 86 39 00 for assistance

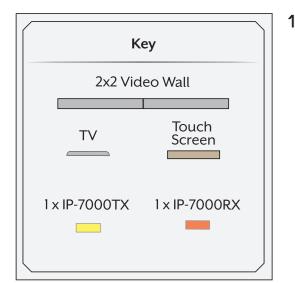

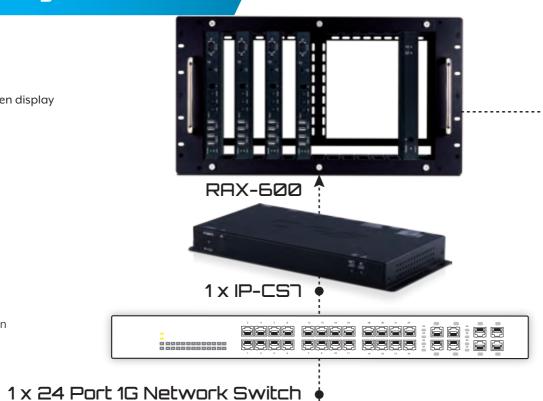



Per Display

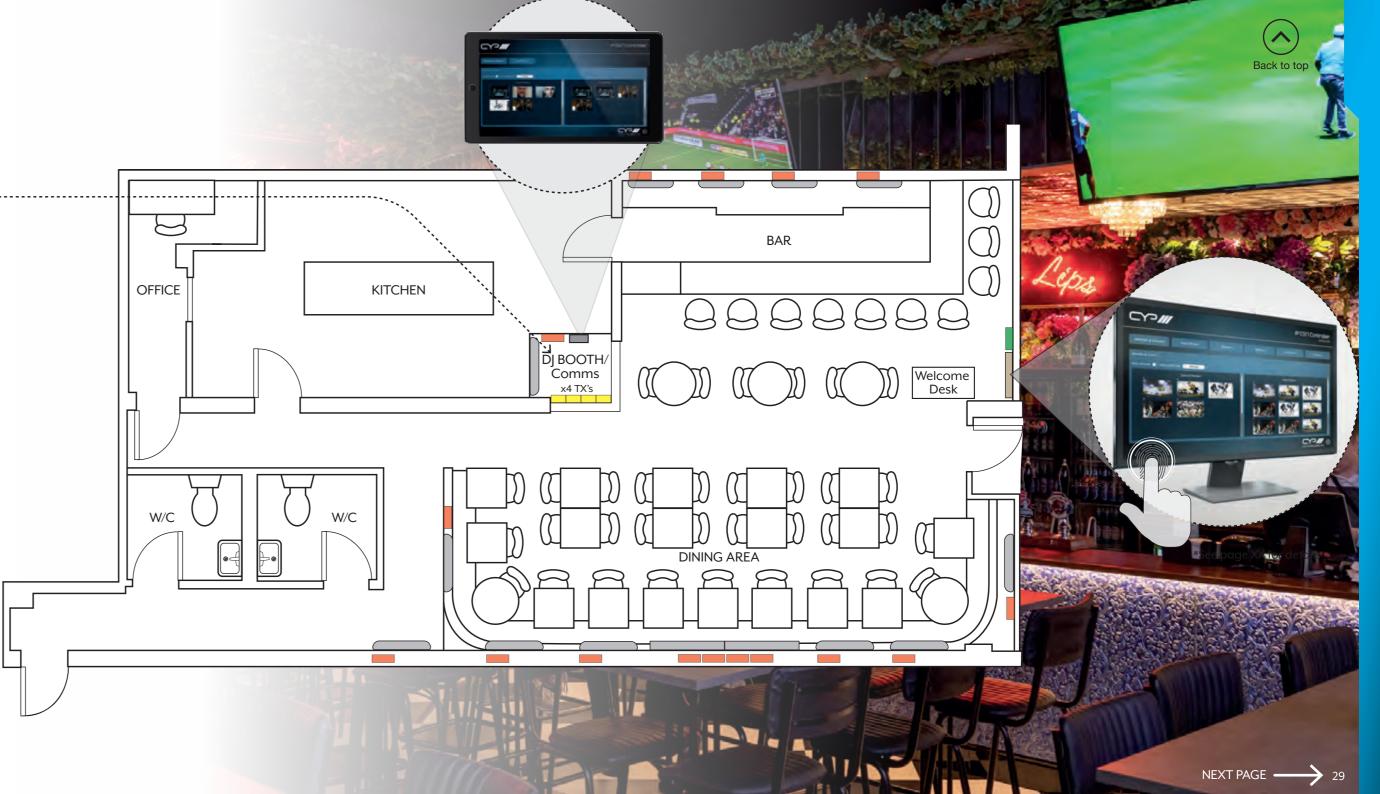




# University Room IP System Layout

## Benefits

- PoE/PoH Power options
- **///** Two way IR
- Wizard setup procedure
- /// Trigger input
- Drag and drop WebGUI control
- Groups and preset configuration
- Multi-view modes

If you can't find the solution you're looking for contact your reseller VIDELCO Europe GmbH on +49 (0) 2102 / 86 39 00 for assistance

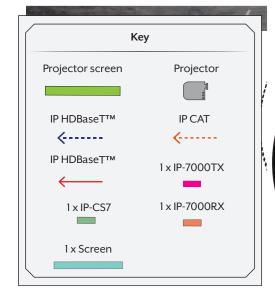

In collaboration with cmd



# University IP System Layout

# Back to top


#### Benefits


Students can show each other their work on the local TV plus the lecturer can both display their laptop or push any students work being displayed locally to the main and sub presenter TV's to display throughout the lecture hall.

The IP-CS7 has a direct trigger input (CR-TGI) that recalls up-to 8 pre-sets configured on the IP-CS7 (As shown on the right)

The IP-CS7 has its own WebGUI and the user can make bespoke I/O changes for the whole connected system through a simple window drag and drop system.

If you can't find the solution you're looking for contact your reseller VIDELCO Europe GmbH on **+49 (0) 2102 / 86 39 00** for assistance

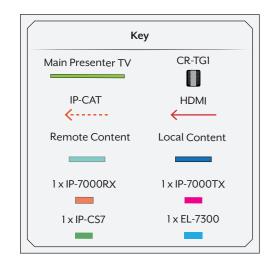


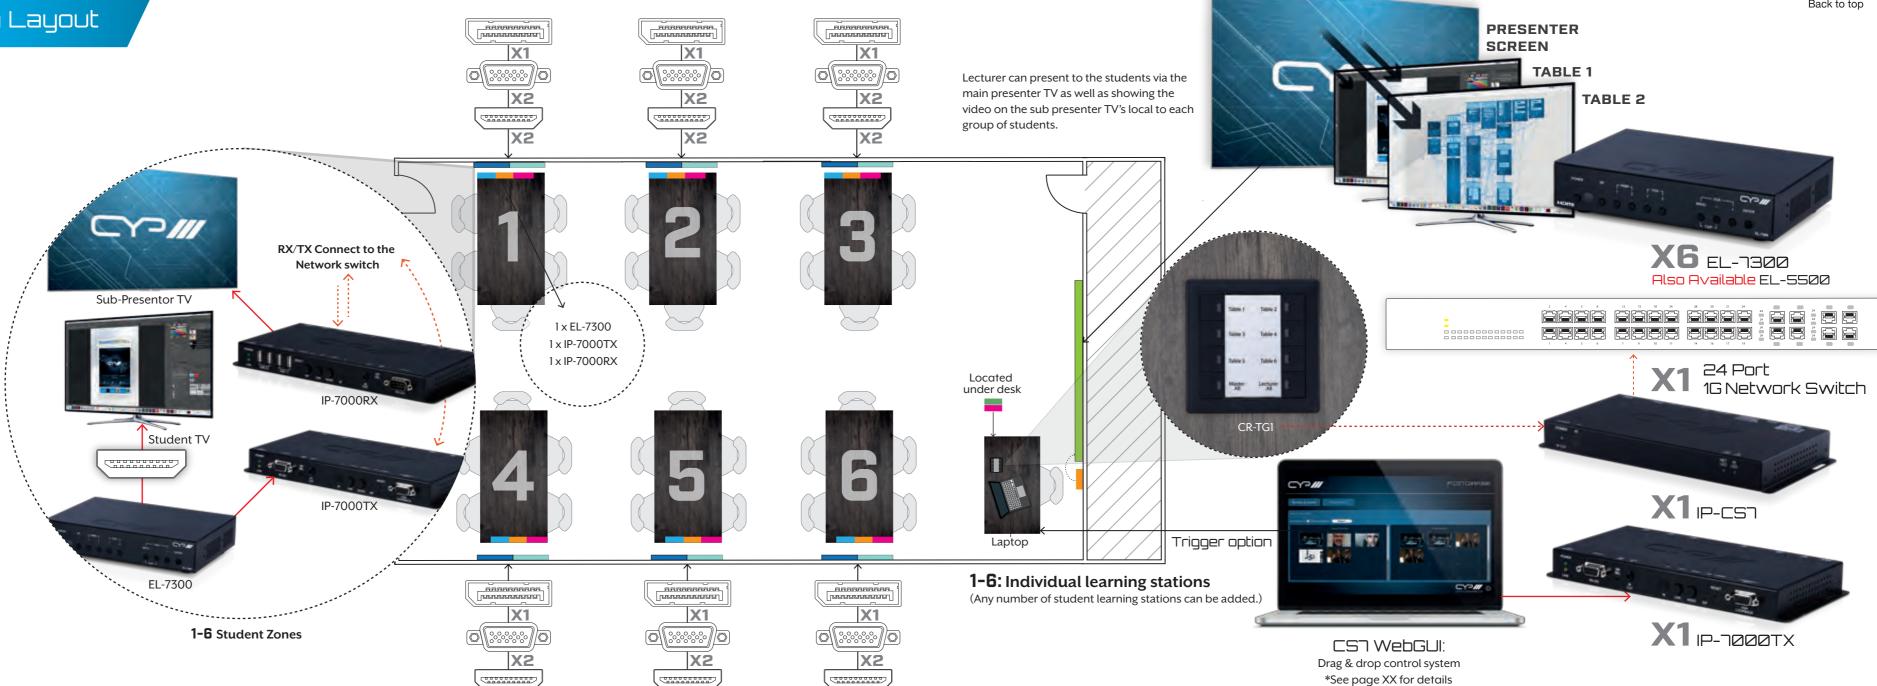


# Classroom System Layout

#### Benefits

- III Supports full HDBaseT™ 2.0 specification signals can be received up to a maximum distance of 100m over CAT6a/7
- HDBaseT 5-Play™ convergence: High-Definition video and audio, 100BaseT Ethernet, PoH (Power over HDBaseT) and control (Bi-Directional IR & RS-232 pass through)
- Supported resolutions VGA~WUXGA, 480i~1080p, 4K UHD@24/25/30Hz (RGB 4:4:4 & YUV 4:2:2), 4K UHD@ 60Hz (YUV 4:2:0), 4K/2K@24/25/30Hz (RGB 4:4:4 & YUV 4:2:2) and 4K/2K@ 60Hz (YUV 4:2:0) dependent upon the output display's EDID settings
- Supports pass-through of HD audio formats: LPCM 2/5.1/7.1CH, Dolby Digital 2/5.1CH, Dolby Digital Plus, Dolby TrueHD, Dolby Atmos and DTS-HD Master Audio
- Optical Audio Pathway
- USB Data Serving for interactive displays

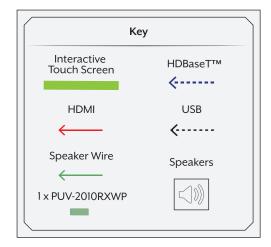


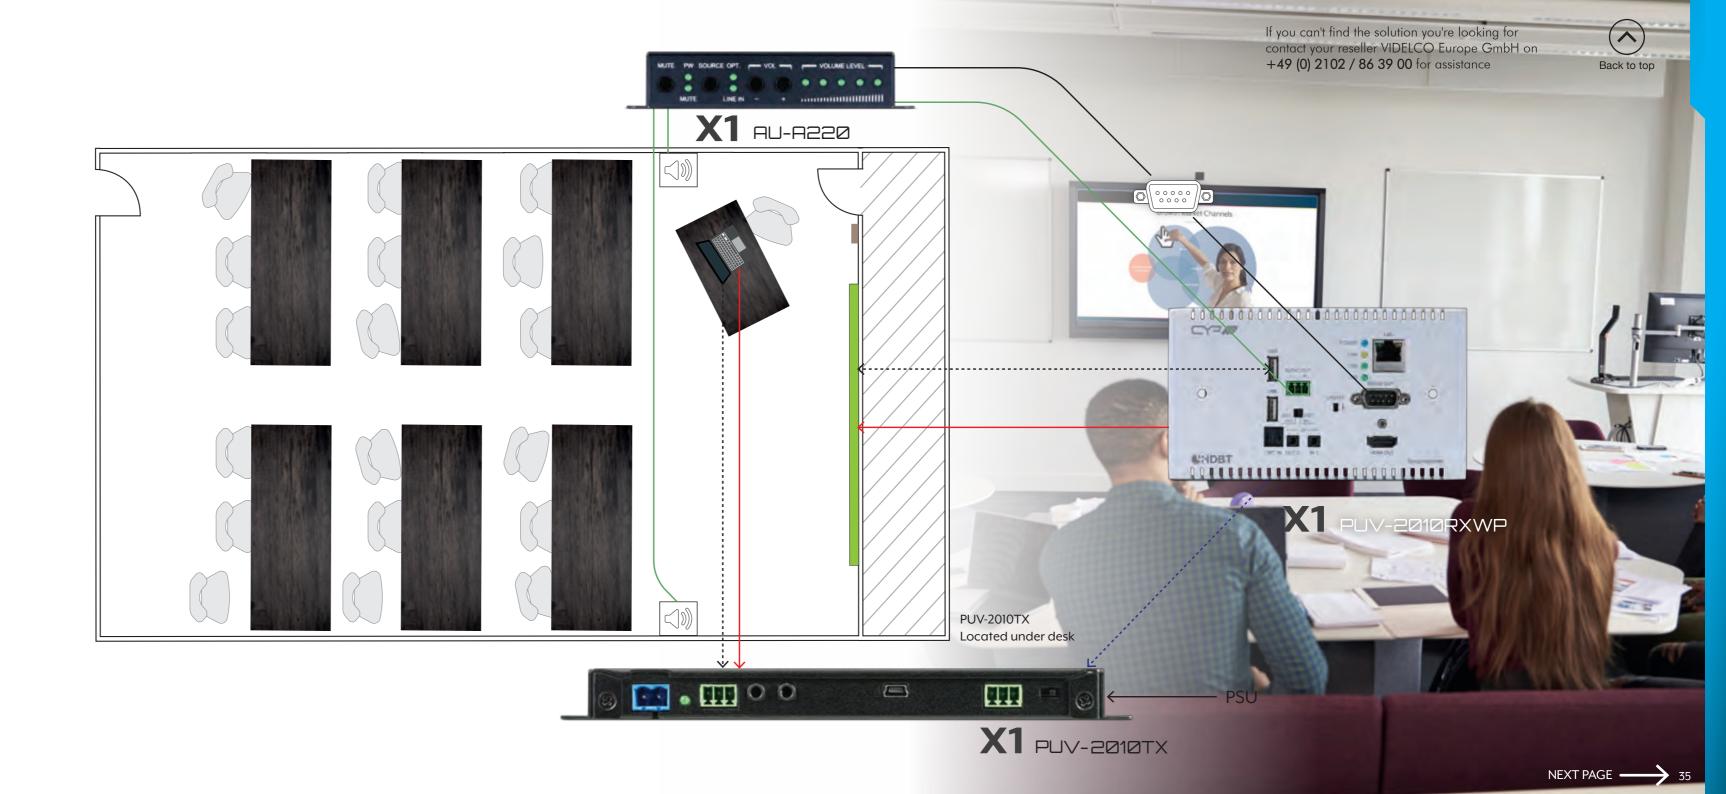


# Lecture Room System Layout

#### **Benefits**

- Supports HDMI 1.4 (including HDCP) over a single CAT5e/6/7 up to 60m
- **III** Complies with HDBaseT<sup>™</sup>- Lite specifications
- Supports multiple inputs: 2×HDMI, 2×VGA and 1×DisplayPort, 3×Unbalanced Audio, 1×MIC In (48V phantom selection)
- Provides simultaneous HDMI and HDBaseT LITE outputs
- Supports HDTV resolutions up to 1080p (VGA to WUXGA)
- Audio DSP offers auto-mixing and auto-gain control for mixing or reducing background audio
- Supports Internal EDID management
- **III** Supports pass-through of PCM 2CH
- Supports control via WebGUI, IR remote and RS-232
- Supports IR In and IR Out to receive or transmit IR signal from compatible HDBaseT receiver with bi-directional RS-232 control
- III Input control provides direct input source selection

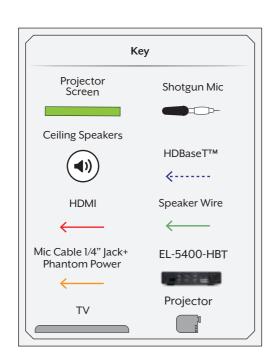

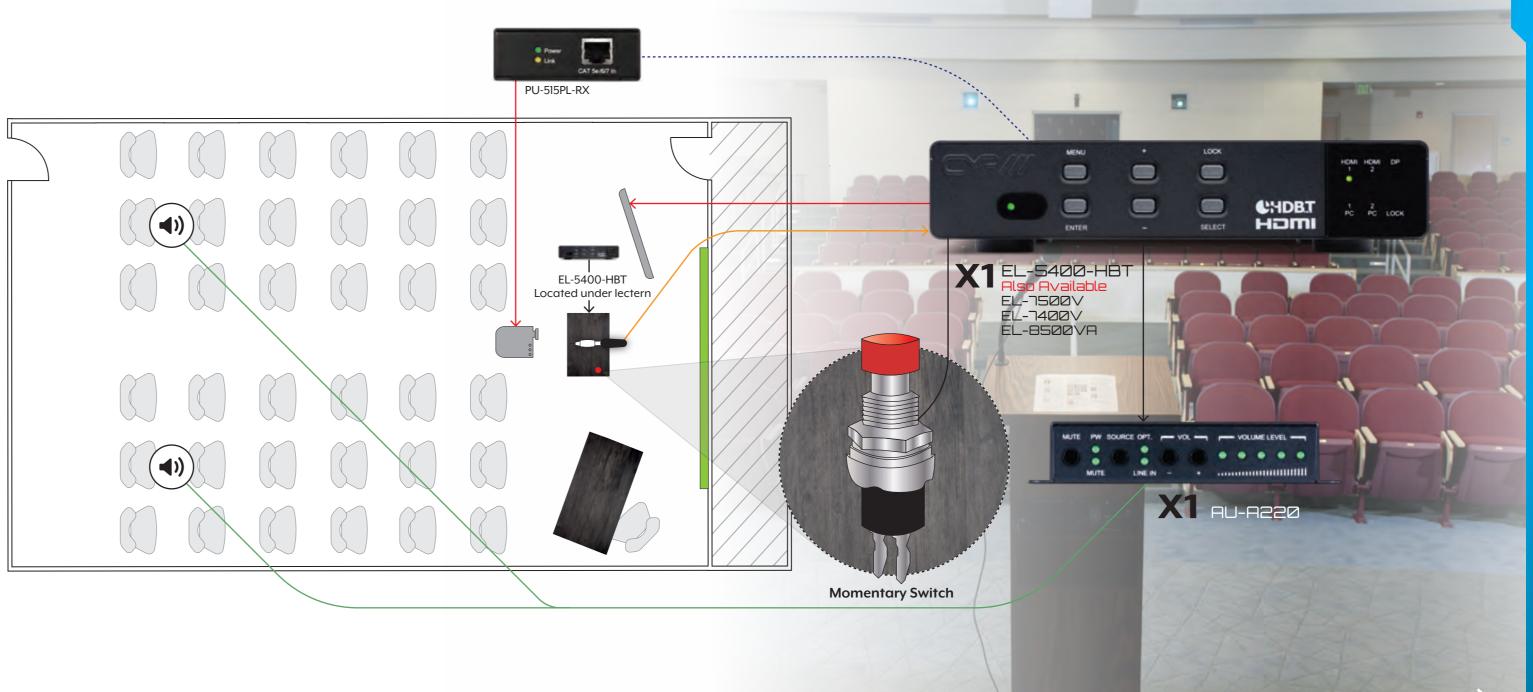

# Digital Signage Solution - DS-VWC

#### Benefits

- HDMI 1.3 & HDCP 1.4 compliant
- 1 HDMI input and 1 HDMI output
- Input and output supports HD resolutions up to 1080p@60Hz
- Create multi display video presentation with displays at any angle and of any aspect ratio and image rotation
- Perfect for creating distinct and eye catching marketing and promotional displays systems
- Low video latency
- Supports pass-through of audio formats including LPCM 2.0/5.1/7.1, Bitstream, and HD Bitstream
- Wide variety of video adjustments, including: contrast, brightness, hue, sharpness, aspect ratio
- Custom EDID management
- Scaler mode features Video mirror, flip and freeze modes
- Basic control of the unit is provided by front panel controls with an informational OSD
- Complete control of multiple units is accomplished by use of video wall PC software application

The Video Wall Control software provides complete control over the Video Wall Rotation Processor via Ethernet or RS-232. This software can scan the local network, as well as any RS-232 connections on the PC, for controllable units to add to the current video wall grouping. Multiple video wall configurations can be stored in the software for quick local recall, or the configurations can be exported as a file for use in other video wall deployments.

In addition to video wall design, creation, and positioning, this software can also be used to configure the scaler mode of the unit, if needed.



# Fiber Operations Room System


#### Benefits

- **III** Enables the management and configuration of multiple compatible SDVoE extenders through a single WebGUI
- Control over matrix, video wall, and multi-viewer modes using WebGUI presets
- Definable display groups
- WebGUI clearly displays the status of all connected Transmitters and Receivers, including IP address, channel selection, etc.
- ## HDMI output displays the WebGUI and system status
- Dual LAN ports enable control over VoIP installations that reside on a logically or physically separate network from the standard local network
- Supports the use of a USB mouse and keyboard to locally control the WebGUI (Optional)
- Can be powered directly by Power over Ethernet (PoE) when connected to an Ethernet switch that follows the 802.3af PoE standard (Optional)
- Trigger Control Keypad support for easy, single-button, preset activation (Optional)
- Standard control is available via WebGUI (remote or local), RS-232, Telnet, IR Remote and triggers

#### Also available is the SDV-CTRX



Every installation is different, and CYP adapt our products to your surroundings so you don't have to compromise on your preferred cable infrastructure. Our SDVoE models are available in CAT or Fiber connectivity types, operating via a 10G network switch. If you have both cable types on site, our CAT and fiber solutions are able to run harmoniously together.

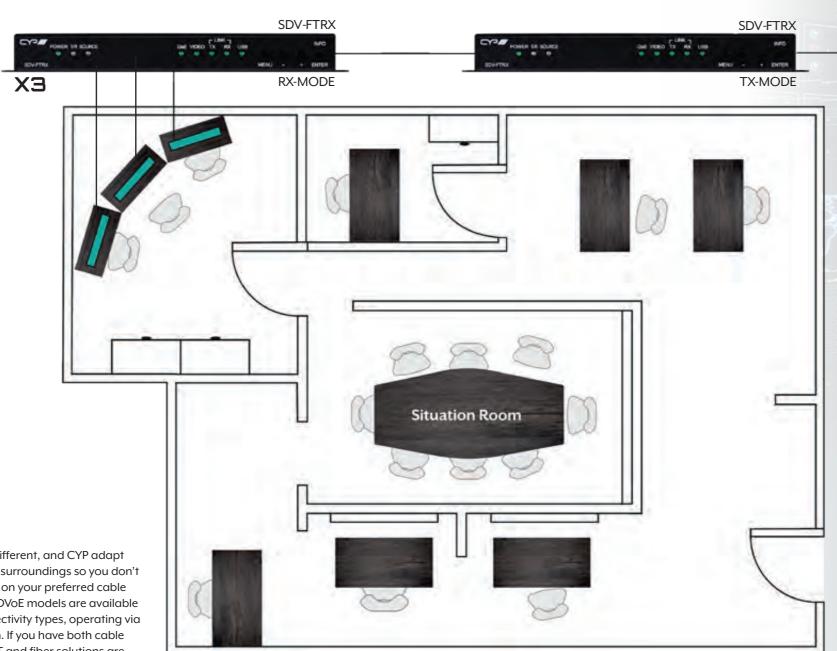

If you can't find the solution you're looking for contact your reseller VIDELCO Europe GmbH on +49 (0) 2102 / 86 39 00 for assistance









#### PUV-1200 Series



1230 O.A.R

Products in the range

PUV-1210PL-RX

PUV-1210PL-TX

PUV-1230PL-RX

PUV-1230PL-TX

#### PUV-1500 Series



1530 O.A.R

PUV-Range Code Specification

Products in the range

PUV-1510RX

PUV-1510TX

PUV-1510RXWP

PUV-1530TX

PUV-1530RX

PUV-1540S-RX

PUV-1550SRX

PUV-1550STX



**Reverse Power** Ideal for corporate installations **Education sector** 

Products in the range

PUV-1602TXWP

PUV-1605S-TXWP

PUV-1610RX

PUV-1610TX

PUV-1620S-TX

PUV-1630TXWP

PUV-1650RX

PUV-1650TX

#### PUV-1600 Series



PUV-1630TTX

#### PUV-1700 Series



**AVLC** 

Products in the range

PUV-1710LRX-AVLC

PUV-1710LTX-AVLC

PUV-1730PLRX-AVLC

PUV-1730PLTX-AVLC

#### PUV-1800 Series



Products in the range

PUV-1810RX-AVLC

**AVLC** 

PUV-1810RX-AVLC

PUV-1820TX-AVLC

PUV-1830TX-AVLC

PUV-1830RX-AVLC

#### PUV-2000 Series



HDBaseT 2.0

Products in the range

PUV-2000RX

PUV-2000TX

PUV-2010RX

PUV-2010RXWP

PUV-2010TX

PUV-2010TXWP

#### PUV-2100 Series



Inc USB **AVLC** 

Products in the range

PUV-2100TX-AVLC

PUV-2100RX-AVLC

#### IP Series



Products in the range

IP-7000TX

IP-7000RX

IP-CS7



SDVoE Series

Products in the range

SDV-FTRX

SDV-CTRX

SDV-CS8

# Find the right cable for the job



#### Premium HDMI

Full 4K/ UHD resolution support (2160p @ 60Hz 4:4:4)

**///** HDR (High Dynamic Range) support

High quality insulated metal connectors with precision termination

High Bandwidth (full 18 Gbps)

/// High Frame Rate (600MHz)

**BT.2020** Colorimetry (10/12 bit / 4:4:4)

ARC (Audio Return Channel) support

CEC (Consumer Electronic Control) support

32 Channel Audio (Dolby Atmos and DTS:X) support

Full High Definition 3D support

**III** HDCP2.2 compliant

**HDMI** Ethernet channel

# Available lengths In metres





#### AOC HOMI ACTIVE OPTICAL CABLE

Active Optical Cable (AOC) is a cabling technology that accepts the same electrical inputs as a traditional copper cable, but uses optical fiber "between the connectors". AOC uses electrical-tooptical conversion on the cable ends to improve speed and distance performance of the cable without sacrificing compatibility with

Passes 18Gbps signals up to 20M with no additional power required

/// Ultra slim HDMI plug

standard electrical interfaces.



#### Ultra-Slim HDMI

HDMI v2.0 compatible and 4K Certified

Full 1080p, 4K and 'Deep Colour' support

Ethernet (HEC) and Audio Return (ARC)

3D Compatible

99.999% Oxygen Free Copper

#### Available lengths In metres















# Rack 'em up!

hether a conventional point to point system **VV** or a fully-Fledged multi-zone environment, organisation of the numerous components is essential when creating the perfect installation. The equipment rack can typically become a very complex place, especially when employing multiple point-to-point extenders, repeaters and breakout boxes etc.

Our new racking solutions offer installers the ideal environment to house multiple components neatly and securely, offering easy access for servicing. Two models are available, both conforming to standard rack depth and width sizes, with both able to house up to 15 components.



Standard 6U (19") Rack Mount Size

Standard 3U (19") Rack Mount Size

15 Individual Component Slots

**III** RAX Rack Accessories Available

Simple Installation/Configuration


Front Panel Lock Off Screws

Cable Access and Tethering Points



PSU: 2 x Multi-PSU housing slots Dimensions: 300mm [W] x 483mm [D] x 130mm [H] Net Weight: 4000g Gross Weight: 5400g

#### RAX-300

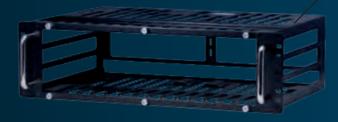

PSU: 2 x Multi-PSU housing slots Dimensions: 300mm [W] x 483mm [D] x 130mm [H] Net Weight: 4000a Gross Weight: 5400g

RAX-300 compatible product	PSU	RAX-600 compatible product	PSU	New products (RAX-300)	PSU	New products (RAX-600)	PSU
AU-IP21	5V	AU-11SA-4K22	5V	AU-A220	24V	PUV-1650RX	48V
AU-11CD-4K22	5V	EL-41S-4K22	5V	PUV-1610TX	N/A	PUV-1650TX	N/A
AU-11CA-4K22	5V	EL-6010-4K22	5V	PUV-1610RX	48V	IP-CS7	5V
CR-CS2	5V	IP-7000TX	N/A	PUV-1710LTX-AVLC	48V	EL-21PIP	5V
PUV-1510TX	48V	IP-7000RX	N/A	PUV-1710LRX-AVLC	N/A	SDV-CS8	5V
PUV-1510RX	N/A	PUV-1550S-TX	24V	PUV-1810TX-AVLC	48V	SDV-CTRX	12V
PUV-1210PL-TX	48V	PUV-1550S-RX	N/A	PUV-1810RX-AVLC	N/A	SDV-FTRX	12V
PUV-1210PL-RX	N/A	QU-4-4K22	5V				
QU-2-4K22	5V	SY-4KS-4K22	5V				
RE-EDID-4K22	5V						

# 16 × 16 Modular Matrix with Audio Matricing MODX-1616

ur most flexible modular matrix yet, the all new MOD X features up to 16 inputs x 16 outputs in multiples of four, allowing integrators to set up bespoke distribution systems across a wide range of connectivity options. Available now, the MOD X will ship with the choice of HDBaseT<sup>TM</sup>, HDBaseT<sup>TM</sup>, HDMI and VGA input/output boards, Audio De-embedding, redundant power supplies and RS-232, Telnet, IP & IR control.

- HDMI 2.0a and DVI 1.0 compliant
- **HDCP 2.2 Compliant**
- 4 x I/O based modular card system up to a maximum of 16 inputs and 16 outputs
- Independent audio I/O matricing
- Supports UHD resolutions up to 3840×2160@60Hz (4:4:4, 8-bit) & 4096×2160@60Hz (4:4:4, 8-bit) plus HDR and Dolby Vision Output video downscaling function, 4K to 1080p
- Advanced EDID management
- Supports pass-through of LPCM 7.1, and all HBR audio codecs, such as Dolby Atmos®, Dolby® TrueHD, Dolby Digital® Plus, DTS:X, DTS-HD Master Audio, and DTS-HD High Resolution Audio
- IP control via Telnet, UDP, and the built-in web server interface
- Field firmware updatable



# IP-CS7 WebGui Interface

When using the IP-CS7 WebGui, it is possible to define and control all of the TX/RX's on the network. It also allows the user to create pre-determined switching groups or pre-sets for added control. The on board set up 'Wizard' adds simplicity to the installation process, guiding the installer through the setup and control features of the unit.

Dual LAN connectivity on the device allows the system to run on a bespoke IP network whilst the additional LAN allows for connection to a secondary network for control and configuration. This is particular useful when access maybe prohibited via the LAN network, the IP-CS7 provides a direct link to the IP video network.

Using the WebGui the user has access to a 'Monitor & Control' area for simple drag and drop control and switching of sources. In this mode the user can see a preview of the content being delivered from the source. The system setup area of the WebGui has protected access rights so to prevent any changes being made to the system by other users. An alternative control method of the device can be achieved by using the Trigger Input interface. This interface allows the user to activate pre-defined functions or pre-sets at the touch of a button. Standard control of the device can be achieved using RS-232. Telnet and the WebGui.



ZONE 3

# PUV-1082-PR0

ur flagship HDBaseT™ matrix has now got even better with the introduction of our proprietary AVLC technology. Featuring 4K support, HDMI 2.0 and HDCP 2.2 compliance with Audio Matricing, the PUV-1082-Pro takes 10 HDMI inputs and transmits out to any one of the eight HDBaseT™ outputs in full 4K@60Hz (4:4:4, 8-bit) HDR10 and Dolby Vision. Two local HDMI outputs and full IR/RS-232/ IP control completes what can only be described as a genuine flagship one-box AV distribution solution.

- **///** 4K@60Hz (4:4:4, 8-bit), HDR10 and Dolby Vision
- 10 x HDMI inputs/8 x HDBaseT™ + 2 x HDMI
- 2 x HDMI Outputs
- /// Audio Matrixing Available from all I/0's
- III Individual Output Scaling RS-232 Pass through

Also available PUV-1082-4K22

If you can't find the solution you're looking for contact your reseller VIDELCO Europe GmbH on +49 (0) 2102 / 86 39 00 for assistance



Back to top



# AV Zone Audio Only Residential PUV-1082 Video Layout Back to top Distribution over HDBaseT™ **CHDB**T LHN KEY CHDBT' HDMI CHDBT MASTER SUITE E CHDBT HDBaseT™ Connection STUDY LIVING ROOM Audio 000 Connection CHDBT CHDBT \*COMMS RACK Projector Surround sound down mixer AU-1HIDD-4K22 Apple 4K TV CHDBIT **HDMI** Outs 0000 CHDBT Mirroring HDBaseT™ THEATRE x2 = 0 \*COMMS RACK PREVIOUS PAGE ——— 15 NEXT PAGE

AV Zone Audio Only Residential PUV-1082 Audio Layout Back to top Speaker Cabling LHN KEY Speaker Cable BED 4 CAT 5e/6/7 Connection Audio Connection to AU-A220 CHOBIT Analogue Audio in MASTER' SUITE Digital CHDBT CHDBT Audio in STUDY wc 🔯 Projector CHDBT G BED 3 Surround Sound \*COMMS Speaker Zone Speaker Zone RACK **ENTRY** AU-1H1DD-4K22 Apple 4K TV Audio Zone Speaker Zone CHDBT\*
Rooms **HDMI** Outs BED 2 Mirroring HDBaseT™ A B CHDBT KITCHEN [C] 2222 PU-305BDA-RX Providing input to local amplifier x2 = 0 AU-A50 \*COMMS RACK NEXT PAGE

# Residential \*3-Zone HDR System

Multi-room AV 4 every home, available 2 order now for 2019

# MA-421

#### Benefits

- Compact Matrix with 4 x HDMI in, 2 x HDBaseT™ out + 1 mirrored HDMI out
- **III** Built in 2 x 20W amplifier plus mirrored line out
- Android and iOS app to control multiple sources & display as well as the matrix
- III Independent output up/down scaling
- 4K HDR 10/12 bit (Dolby Vision) with AVLC (Adaptive Visually Lossless Compression)
- **///** 4K 50/60Hz (RGB/YUV 4:4:4 & YUV 4:2:2 & 4:2:0)
- **///** HDMI 2.0A & HDCP 2.2
- Ships with 1 x PUV-1710LRX-AVLC included

#### Available on the










PUV-1710LRX-AVLC

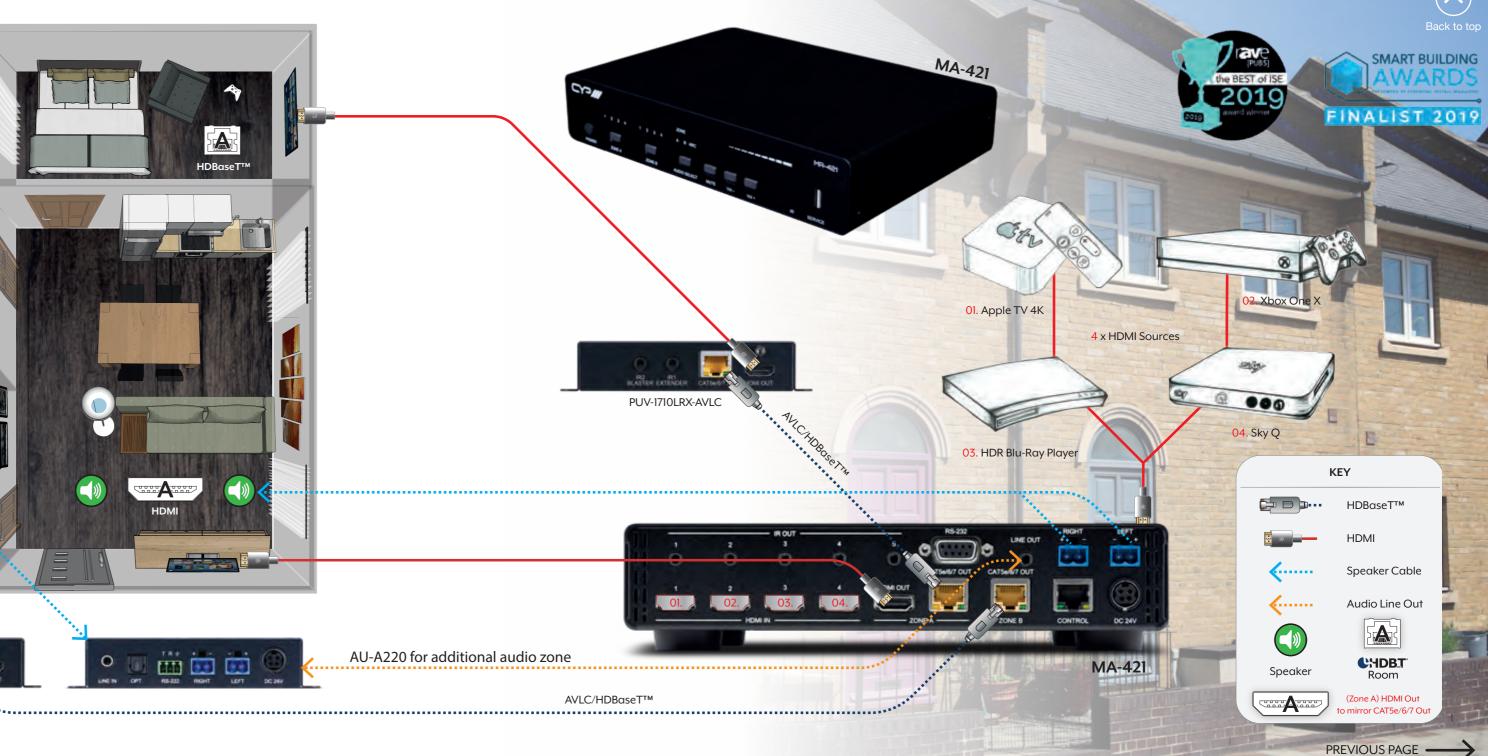


# 4-Zone PUV-44XPL-AVLC Matrix System

#### **Benefits**


- **111** 2.0A HDMI and HDCP2.2 compliant
- 4K/2K & 4K HDR signals can be transmitted up to 35m via CAT5e/6 and 60m via CAT6a/7
- Supports breakout of L/R analogue audio for each HDBaseT Zones (Outputs A to D).
- Supported HDBaseT resolutions: VGA~WUXGA, 480i~1080p, 4K UHD@24/25/30Hz (RGB 4:4:4 & YUV 4:2:2), 4K UHD@ 60Hz (YUV 4:2:0), 4K/2K@24/25/30Hz (RGB 4:4:4 & YUV 4:2:2) and 4K/2K@ 60Hz (YUV 4:2:0) dependent upon the output display's EDID settings
- ## 4K/2K & 4K UHD signals can be transmitted up to 35m via CAT5e/6 and 60m via CAT6a/7
- Supplied with 4x PUV-1710LRX-AVLC receivers
- Compact 1U rack mount design
- **III** EDID Management
- **III** Includes 4 x receivers


If you can't find the solution you're looking for contact your reseller VIDELCO Europe GmbH on +49 (0) 2102 / 86 39 00 for assistance

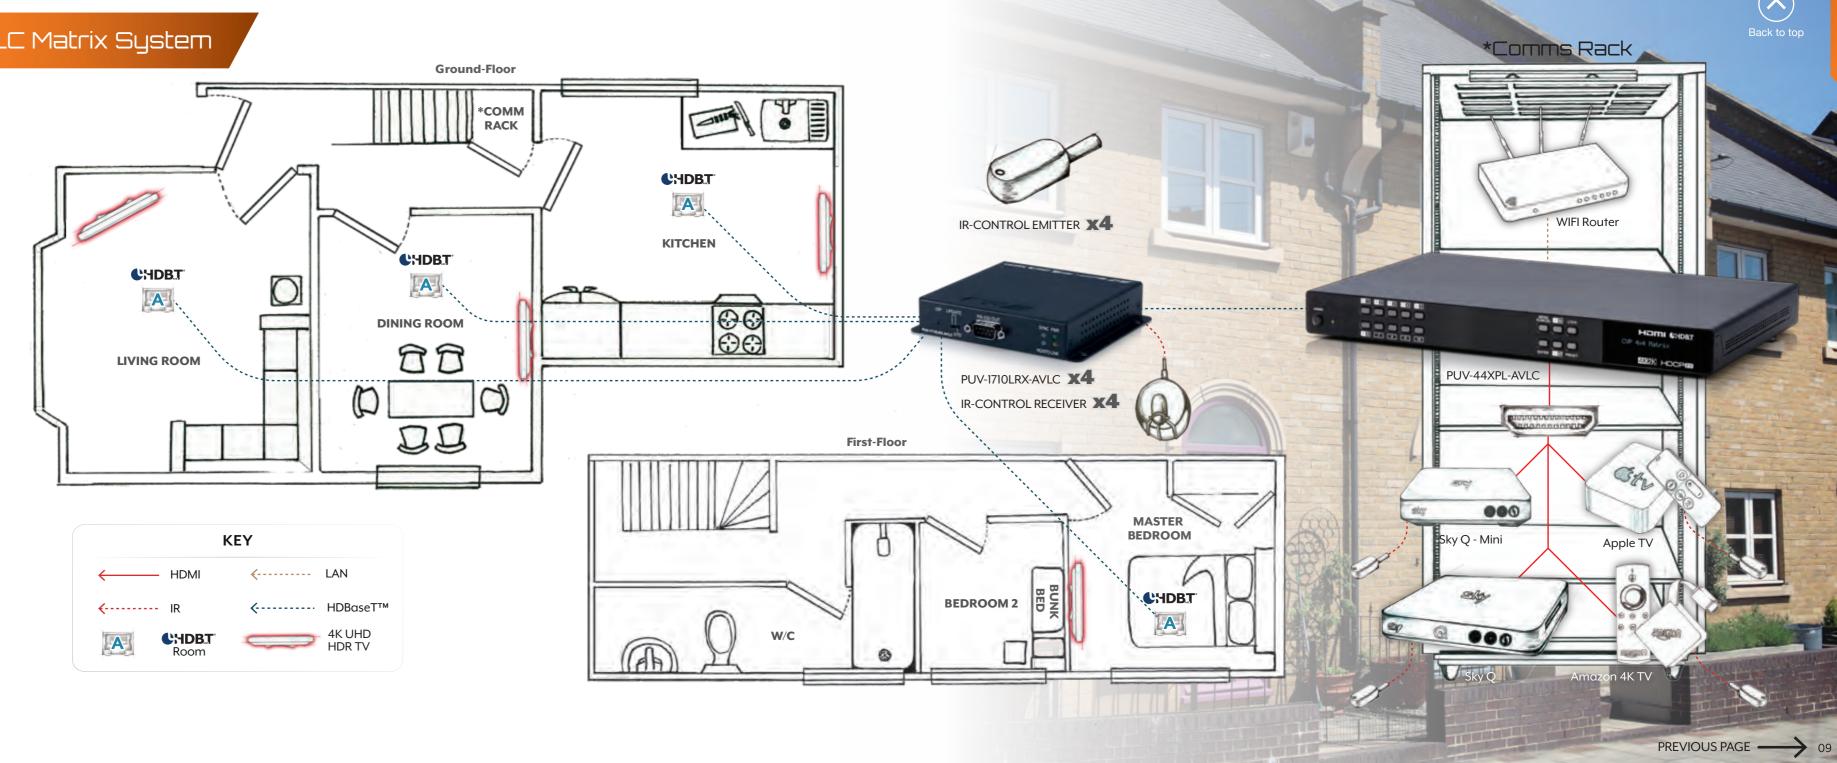

If you can't find the solution you're looking for contact your reseller VIDELCO Europe GmbH on +49 (0) 2102 / 86 39 00 for assistance



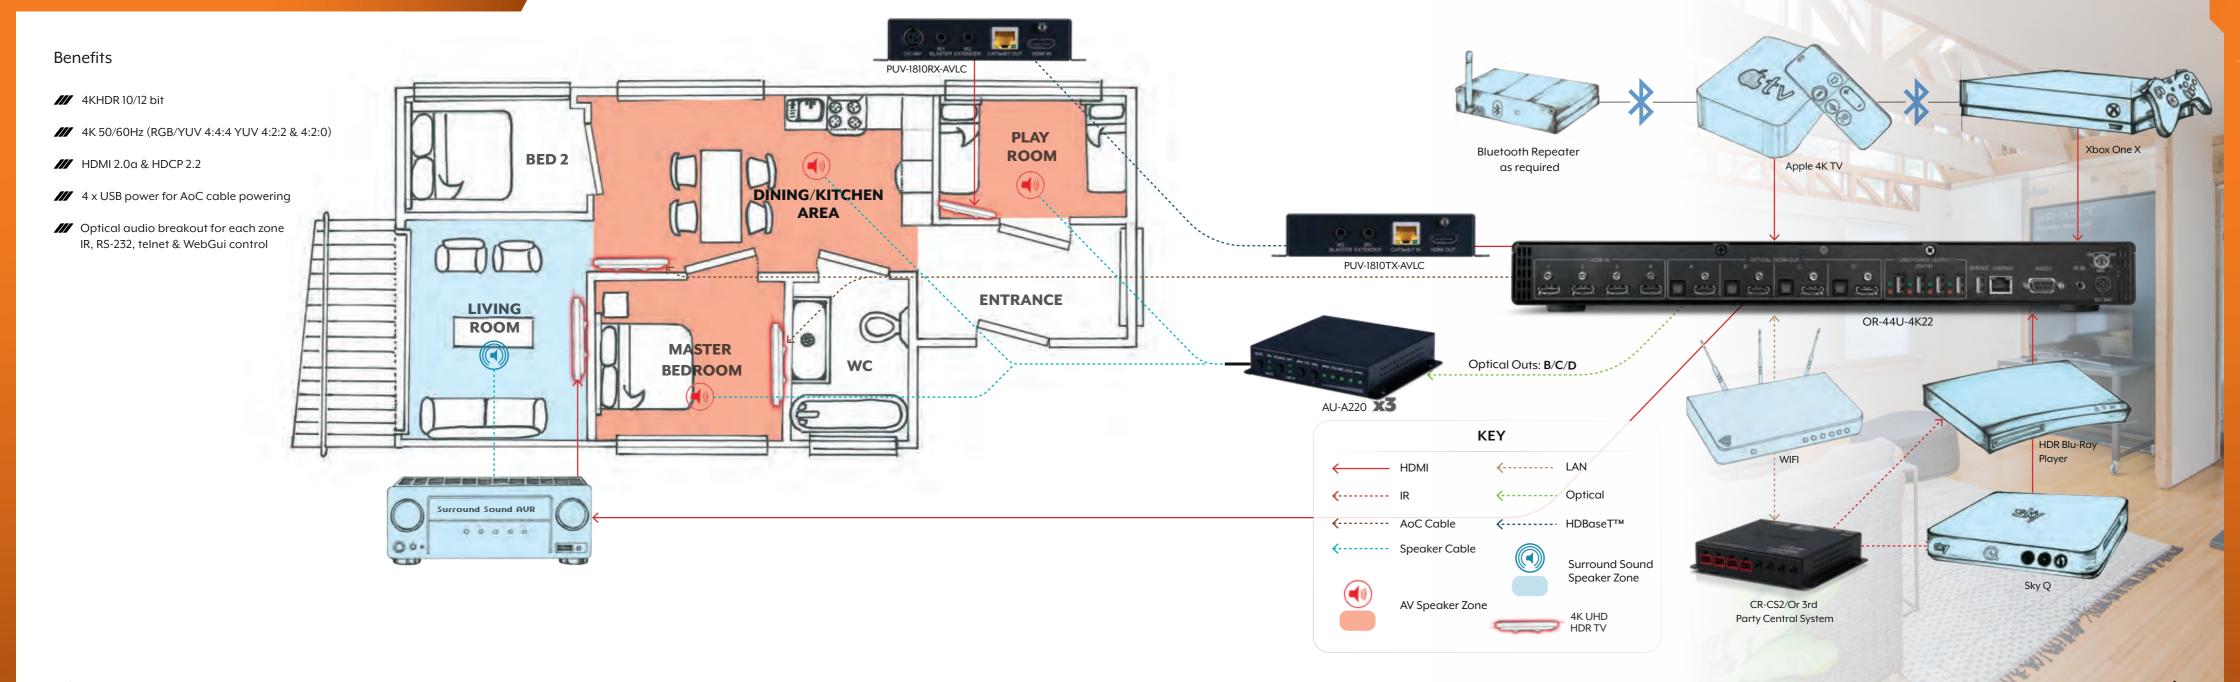

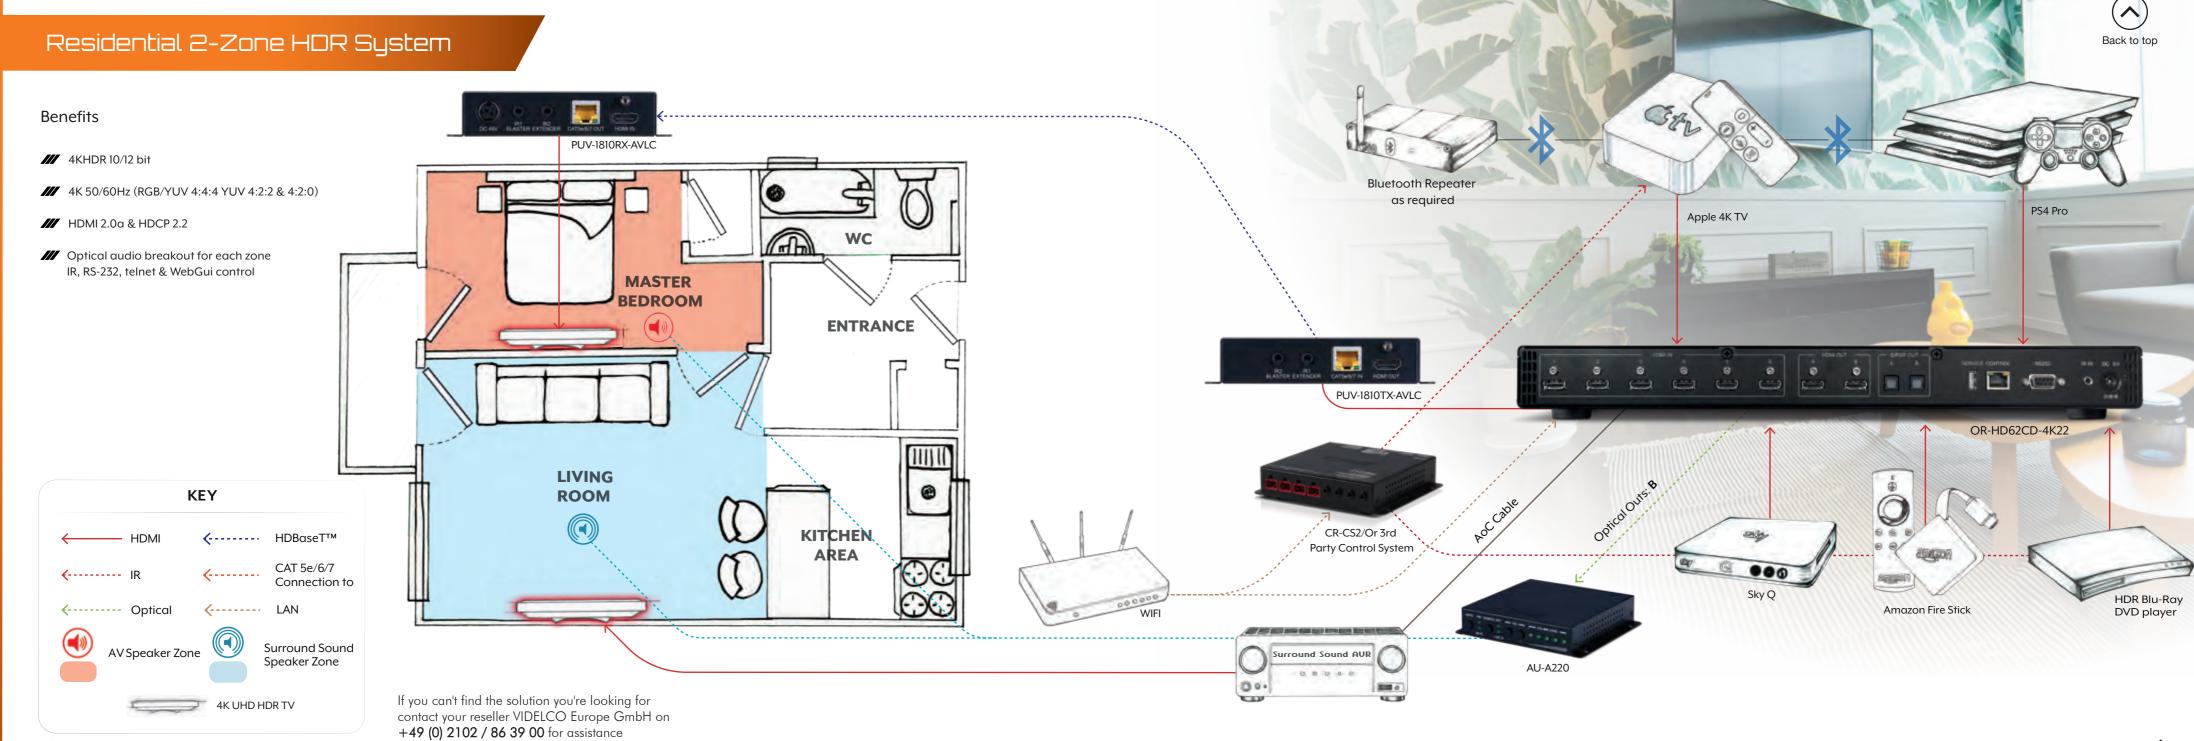

# Table of Contents



INTRODUCTION

A brief introduction into what this guide is all about!

**RESIDENTIAL 2 ZONE** HDR SYSTEM

2 zone room solution showing the OR-HD62CD-4K22

HDR SYSTEM

showing the OR-44U-4K22

4-ZONE 44XPL-AVLC MATRIX SOLUTION

> Downstairs and upstairs room solution showing the PUV-44XPL-AVLC

**RESIDENTIAL \*3-ZONE** 

3 Zone room solution showing the new MA-421

**RESIDENTIAL PUV-1082** AUDIO LAYOUT

Large house solution for the PUV-1082 audio layout

**RESIDENTIAL PUV-1082** VIDEO LAYOUT

Large house solution for the PUV-1082 video layout

Introduction

From a simple two-zone audio distribution system through to a complete whole-house video and audio distribution system with control, CYP manufactures a wide-range of connectivity and signal distribution solutions that will allow you to do whatever you want with your AV.

Heading up the range is the PUV-1082PRO, which features ten HDMI inputs that are independently switchable to any of the eight HDBaseT outputs and two HDMI local outputs. Incorporating an independent audio matrix, IR control of any source via the display location and the ability to transmit HD video up to 18GBPs over Cat5e/6/7 cables, this is our flagship matrix product, which offers a wealth of control and feature options.

Whether it is running a Sky box video and audio signal into another room through to breaking out the audio from any source, sending it to up to ten different rooms whilst watching an alternative programme on-screen, CYP's range of matrix and switching options offer homeowners total flexibility.

"Home is where our story begins"

Annie Danielson

If you can't find the solution you're looking for contact your reseller VIDELCO Europe GmbH on +49 (0) 2102 / 86 39 00 for assistance

VIDELCO Europe GmbH - Professionelle Audio-, Video-, Medien-Technik Fon: +49 (0)2102 / 86 39-00 • Fax: +49 (0)2102 / 86 39-17 • info@videlco.eu • www.videlco.eu

