

5 Mega-pixel Outdoor IR PoE IP Camera



Professional, High Resolution, Day and Night Network Camera

PLANET ICA-3550V Network Camera with IR Illuminator is a high resolution camera for the round-the-clock surveillance over IP networks. This camera supports H.264, MPEG-4, and JPEG compression formats and delivers excellent picture quality in 5 mega-pixel resolutions at 15 frames per second (fps) and full HD resolutions at 30fps. For easy management and waterproofing, the ICA-3550V is also equipped with a mounting bracket that conceals all cables within. The IP66-rated housing protects the camera body against rain and dust and ensures operation under extreme weather conditions, which makes it an ideal solution for outdoor applications, e.g. surveillance of buildings, roads, parking areas, garages, railway stations, airports and more.

5 Mega-pixel Resolution



Camera

- 1/3.2" 5MP progressive scan CMOS sensor
- 3~10.5 mm vari-focal, DC auto-iris lens
- 0 lux minimum illumination at F1.4
- Maximum resolution 2592 x 1944
- Removable IR-cut filter for Day & Night function

Video / Audio

- Simultaneous H.264 / MPEG-4 and M-JPEG video compression
- Simultaneous multi-stream support
- H.264 high profile, main profile and baseline
- Max. resolution of 1080p at 30fps and 5 mega-pixel at 15fps
- 3DNR to improve picture quality at low lux
- WDR enhancement function strengthens visibility under extremely bright or dark environments
- Two-way audio support with enhanced audio quality

Network and Configuration

- Compliant with IEEE 802.3af PoE interface for flexible deployment
- Auto MDI/MDI-X supported
- Supports both IPv6 and IPv4 protocols
- RTSP / UPnP / 3GPP / HTTPS protocols selectable

Easy Installation & Management

- ONVIF compliant for interoperability
- Built-in 35 IR illuminators, effective up to 25 meters
- IP66 outdoor classifications with cable management bracket for rigorous environment
- Built-in Samba client for NAS
- 3GPP for 3G mobile remote applications
- Micro SD card local video recording supported
- Digital Input/Output for integration with sensors and alarms
- Cam Viewer 3 Central Management software supported

Day & Night Functionality

To adapt to constantly changing lighting conditions, the ICA-3550V comes with a removable IR-cut filter and built-in IR illuminators, which enable the camera to provide color video when there is sufficient light, and black/white video in dark conditions. The ICA-3550V is able to maintain clear images 24 hours a day.



Exceptional Image Quality

Together with powerful image processing attributes like Wide Dynamic Range (WDR) and 3-dimensional Noise Reduction (3DNR) technology, the ICA-3550V is able to filter the intense backlight surrounding a subject and remove noises from video signal. The result is that an extremely clear and exquisite picture quality can be produced even under any challenging lighting conditions.



Advanced Event Management

The ICA-3550V supports a number of advanced features to enhance surveillance flexibility and event management capabilities. The advanced features include auto-iris for improving the image quality to avoid overexposure, AV out for two-way audio function, and inputs/outputs for connecting to external devices such as door sensors and relays to activate light or close doors.

2-way Audio




Flexible Installation and Power Functionality

The ICA-3550V incorporates IEEE 802.3af Power over Ethernet technology and can be powered from a PoE Switch via the network, which eliminates the need for power cables and reduces installation costs. The ICA-3550V is ONVIF-compliant and therefore interoperable with other brands in the market, greatly supporting users to integrate with their existing surveillance network. In addition, the ICA-3550V includes 64-CH central management software for efficient monitoring. The ICA-3550V is indisputably the top choice for reliable and high performance surveillance.



Vari-focal and Camera Tampering Detection Offers the Best Recording Flexibility

The ICA-3550V incorporates the mega-pixel vari-focal lens, which has the option of selecting a high millimeter setting for narrow viewing fields or a low millimeter setting for wider viewing fields. The ICA-3550V is also provided with three individually configurable motion detection zones. The camera can record video or trigger alarms or alerts when camera image is tampered.

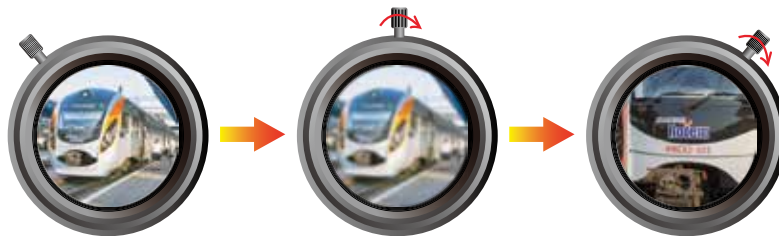


Vari-focal lens for available focal lengths



Applications

PLANET ICA-3550V can perform in various surveillance applications. With high resolution design, it can capture clear images and is perfect for identifying objects and persons. Moreover, the ICA-3550V supports 802.3af PoE interface and facilitates the outdoor surveillance applications without worrying the electric source area.

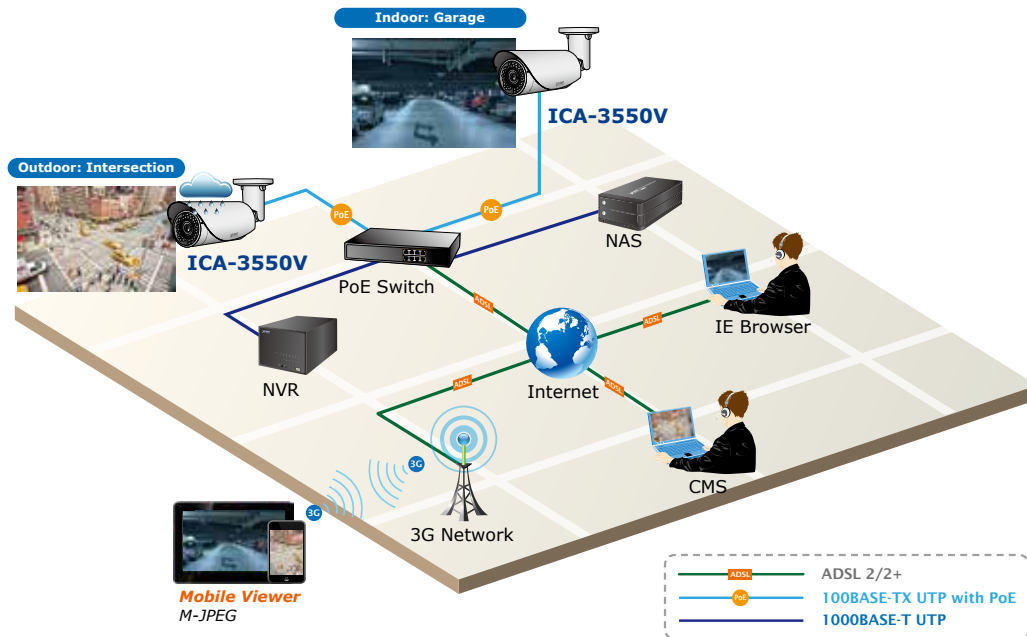

Specifications

| | |
|---------------------|---|
| Model | ICA-3550V |
| Camera | |
| Image Device | 1/3.2" 5 mega-pixel progressive scan CMOS Sensor |
| Lens | Vari-focal 3~10.5 mm, DC auto-iris Mechanical IR-cut filter Angle of view: Horizontal: 25.49~85.02 degrees Vertical: 19.09~65.47 degrees |
| Min Illuminator | 0 lux @ F1.4 |
| IR Illumination LED | IR LED*35, 850nm Built-in IR illuminators, effective up to 25 meters |
| Effective Pixels | 2592 x 1944 pixels |
| Image | |
| Video Encoder | H.264 / MPEG-4 / M-JPEG |
| Video Profile | H.264: 2592 x 1944 / 1080P / 720P / QXGA / UXGA / 1280 x 960 / VGA / QVGA / QCIF M-JPEG: 2592 x 1944 / 1080P / 720P / QXGA / UXGA / 1280 x 960 / VGA / QVGA / QCIF MPEG4: VGA / QVGA / QCIF (Only for 3GPP) |
| Frame Rate | 5MP up to 15fps Full HD up to 30fps |
| Image Setting | Brightness, sharpness, contrast, AGC, night mode text, time and date overlay |
| Streaming | Simultaneous multi-profile streaming M-JPEG streaming over HTTP Supports 3GPP mobile surveillance Controllable frame rate and bandwidth Constant and variable bit rate (MPEG4 / H.264) |
| Audio | |
| Audio Streaming | Two-way audio |
| Audio Encoder | RTSP: G.711 / G.726 3GPP: AMR |

| | |
|-----------------------------------|--|
| Microphone | External microphone input |
| Audio Output | Phone jack |
| Network and Configuration | |
| Network Standard | IEEE 802.3 10BASE-T IEEE 802.3u 100BASE-TX |
| Supported Protocols | IPv6, IPv4, HTTP, HTTPS, SNMP, QoS/DSCP, Access list, IEEE 802.1X, RTSP, TCP/IP, UDP, SMTP, FTP, PPPoE, DHCP, PLANET DDNS, PLANET Easy DDNS, NTP, UPnP, 3GPP, SAMBA, Bonjour |
| Security | Password protection, IP address filtering, HTTPS encrypted data transmission, 802.1X port-based authentication for network protection, QoS/DSCP |
| Users | 10 simultaneous unicast users |
| System Integration | |
| Application Programming Interface | Open API for software integration SDK ONVIF |
| Alarm Triggering | Intelligent video motion detection and external input 3-zone video motion detection |
| Alarm Events | File upload via FTP, email and SAMBA External output activation Configurable pre/post alarm buffering |
| General | |
| Power Supply | 12V DC, 1A IEEE 802.3af Class 0 |
| Power Consumption | DC 12V : 8W (IR On); 5W (IR Off) PoE : 8.16W (IR On); 5.28W (IR Off) |
| Housing | Weather-proof IP66-rated housing |
| Operating Temperature | -20 ~ 50 degrees C |
| Operating Humidity | 20 ~ 80% (non-condensing) |
| Weight | 1000g |
| Dimensions (Φ x L) | 83 x 180 mm |
| Emission | CE, FCC |
| Connectors | 10/100 Mbps Ethernet, RJ-45 DC power jack Terminal block for 1 alarm input, 1 output and factory default reset External microphone input Audio out Micro SD/SDHC card slot (max. 32GB, class 10) Composite video out |

Ordering Information

| | |
|-----------|---------------------------------------|
| ICA-3550V | 5 Mega-pixel Outdoor IR PoE IP Camera |
|-----------|---------------------------------------|

Related Products

| | |
|------------|---|
| ICA-3250V | Full HD Outdoor IR PoE IP Camera |
| ICA-3350P | 3 Mega-pixel Remote Focus Bullet IR IP Camera |
| ICA-W3250V | Full HD Outdoor IR Wireless IP Camera |
| CV3P-4 | 4-Channel Cam Viewer 3 Professional |
| CV3P-8 | 8-Channel Cam Viewer 3 Professional |
| CV3P-16 | 16-Channel Cam Viewer 3 Professional |
| CV3P-36 | 36-Channel Cam Viewer 3 Professional |
| CV3P-64 | 64-Channel Cam Viewer 3 Professional |
| NVR-820 | 8-Ch Network Video Recorder with HDMI |
| NVR-915 | 9-Ch Network Video Recorder |
| NVR-1615 | 16-Ch Network Video Recorder |
| NVR-1620 | 16-Ch Network Video Recorder with HDMI |
| NVR-3210 | 32-Ch Network Video Recorder |
| NVR-3250 | 32-Ch Rack-mount Network Video Recorder |
| NVR-3280 | 32-Ch Rack-mount Network Video Recorder with 8-bay Hard Disks |
| CV3-M1024 | 1024-Channel Central Management Software |

2015-07

Ein Vertriebsprodukt von:

VIDELCO Europe Limited – Professionelle Audio-, Video-, Medien-Technik
Fon: +49 (0)2102 / 86 39-00 • Fax: +49 (0)2102 / 86 39-17 • nfo@videlco.eu • www.videlco.eu