1T-DA-674 HDMI Distribution Amplifier



Key Features

- HDMI v1.4, HDCP 1.1 and DVI 1.0 Compliant
- Allows distribution of 4 Outputs
- 3D video resolution support (Frame Pack, Side /Side)
- Supports 10/12-bit Color Depth Display
- Supports PC resolutions to WUXGA / 4kx2k@30Hz
- Supports HDTV resolutions to 1080p60
- Supports SDTV resolutions of 480i and 576i
- Optional HDMI to DVI Adaptors for DVI support
- Signal Equalization feature enables longer cable runs
- Supports Automatic Discovery o f Monitor EDID

1T-DA -674 HDMI Distribution Amplifier Overview

Provides 4 independent outputs from a single HDMI input for distribution to devices capable of receiving and/or displaying such signals. The product is compatible with HDMI v1.4 specifications; a cutting-edge technology that supports Deep Color (10 -bit and 12-bit) video in addition to 3D video resolutions (Frame Packing, Side by Side). SDTV resolutions 480i/576i, HDTV resolutions to 1080p and UHD 4k resolutions to 4096x2160@24Hz are also support ed along with the HDCP standard. In addition, the HDMI DA exhibits high bandwidth (up to 300MHz - 9Gbps) and provides signal amplification and equalization for high performance processing of audio and video allowing signals to travel great distances without quality loss. DVI 1.0 format is supported (using cable adapters) and the product provides automatic discovery of monitor EDID. A screw on power adapter cable prevents inadvertent disconnection of power and, as a bonus feature; all HDMI outputs can be cas caded.

Specifications

Video Inputs		Mechanical	
HDMI	1x via HDMI Connector	Dimensions (H x W x D)	41.5 x 218 x 133.4mm
Video Inputs			(16" x 8.6" x 5.25")
HDMI	4x via HDMI Connector	Weight	0.85 g (1.87 lbs.)
General		Environmental	
Video Bandwidth	300MHz/9Gbps	Operating Temperature	0° to +40°C (+32° to +104°F)
Color Depth	10/12bit Color Depth Display	Operating Humidity	20% to 90%, Non -condensing
Maximum PC/DVI Resolutions	WUXGA@60Hz	Storage Temperature	0° to +60°C (+32° to +140°F)
Maximum HDTV/UHD Formats	1080p60, 2560 ×1600@60,	Storage Humidity	20% to 90%, Non -condensing
	3840x2160@30, 4096x2160@24	Regulatory Approvals	
Compliance	HDMI V1.4, HDCP V1.1, DVI V1.0	HDMI DAs	FCC, CE, RoHS
Signal Equalization	Internal	Power Supply	UL, CUL, CE, PSE, GS, RoHS
Maximum Distances		Accessories Included	
Source to DA	20m (60') for 1080 p/8-bit, 15m (45')	1x AC Power Adapter	US, UK or Euro
	for 1080p/12-bit	1x Instruction Manual	
DA to Display	15m (45′) for 1080p/8-bit, 10m (30′)	4 x Ru bber Feet	
	for 1080p/12-bit	Optional Accessories	
Warranty		RM-220 Rack Mount Kit	Dual DA Mount
Limited Warranty	3 Years Parts and Labor	Product Item Number	
Power Requirement		1T-DA-674	1x4 HDMI DA
External Power Supply	5VDC@2.6A		






1T-DA-674 HDMI Distribution Amplifier



Panel Drawings

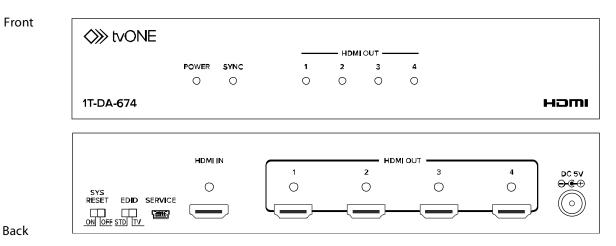

Version 1.0

