


Universal two input TPS (HDBaseT™) transmitter with built in Event Manager



Part No: 9154 0012

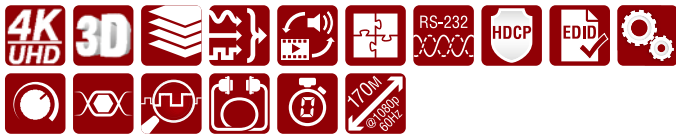

## Highlight features

- 4K and UHD video
- Extends HDMI or VGA + Audio + Ethernet + RS-232 + IR over a single CAT5e...CAT7e cable up to 170 m distance\*
- Event Manager
- 10/100 Ethernet extension
- Bi-directional RS-232 and IR
- IR and RS-232 connection supports command injection
- Embeds analog audio

Lightware's new UMX-TPS-TX120 transmits universal video at a resolution up to 4K, audio and control up to 170 m distance\* over a single CAT cable. This transmitter was designed for digital and analog video and audio signals e.g. VGA, YPrPb and HDMI1.4 with analog stereo audio from local input or embedded 7.1 HBR audio and to handle HDCP encryption. Analog signals (both audio and video) are converted to a digital format and can be transmitted separately from each other. Using the factory, custom or transparent EDID emulation the user can fix and lock EDID data on each input connector. Advanced EDID Management forces the required resolution from any video source and fixes the output format conforming to the system requirements. The unit offers bi-directional and transparent IR, RS-232 and Ethernet transmission. Furthermore the IR and RS-232 connection supports command injection, allowing it to send any IR or RS-232 control command directly from the LAN connection.


Remote powering is available through the single CAT cable, but local power supply can also be used. The device can be mounted on a rack shelf or used standalone. Due to Lightware's attentive design the UMX-TPS-TX120 is compatible with both the HDBaseT™\*\* extenders and matrix boards.

\*Depends on cable category and quality


\*\* For further details see page 6

HDBaseT™ and the HDBaseT Alliance logo are trademarks of the HDBaseT Alliance

## Standalone application

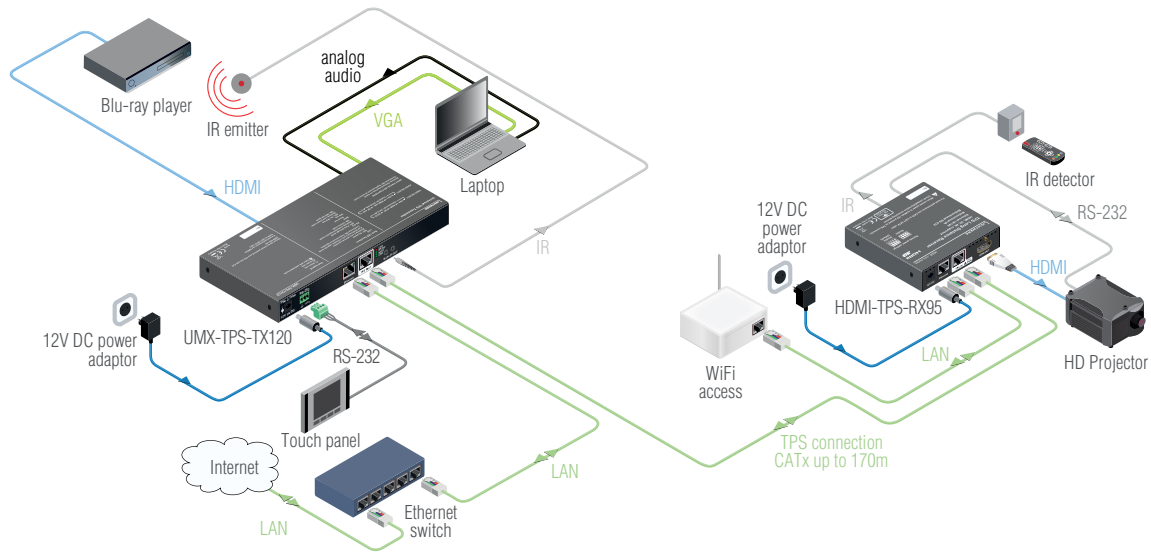

## Application diagram

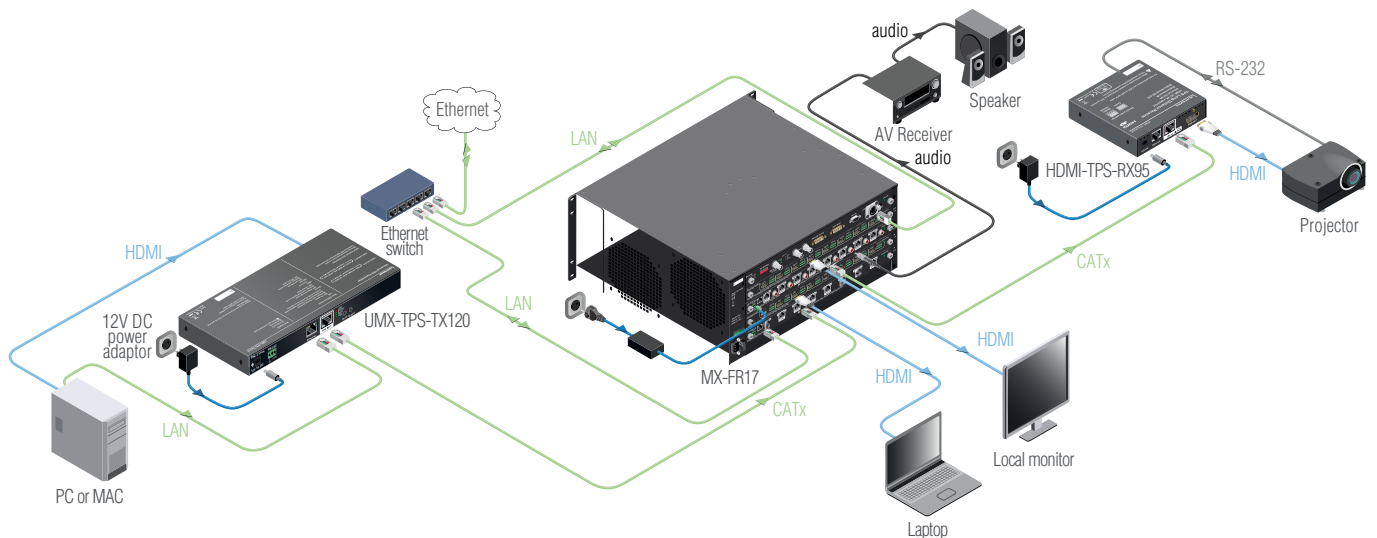

## Maximum twisted pair distances

Resolution	Pixel clock rate	Cable lengths ( Auto / Longreach TPS mode)		
		CAT5e AWG24	CAT7 AWG26	CAT7 AWG23
1024x768@60Hz	65 MHz	100 m / 130 m*	90 m / 120 m*	120 m / 170 m*
1280x720p@60Hz	73.8 MHz	100 m / 130 m*	90 m / 120 m*	120 m / 170 m*
1920x1080p@60Hz / 24bpp	148.5 MHz	100 m / 130 m*	90 m / 120 m*	120 m / 170 m*
1920x1200@60Hz	152.9 MHz	100 m / NA	90 m / NA	120 m / NA
1600x1200@60Hz	162 MHz	100 m / NA	90 m / NA	120 m / NA
1920x1080@60Hz / 36bpp	222.75 MHz	70 m / NA	70 m / NA	120 m / NA
3840x2160@30Hz UHD	297 MHz	70 m / NA	70 m / NA	90 m / NA
4096x2160@30Hz 4K	297 MHz	70 m / NA	70 m / NA	90 m / NA


\*with long reach firmware option. Long reach firmware supports pixel clock frequencies up to 148,5 MHz.

## Event Manager


The Event Manager is a completely new feature of Lightware's UMX-TPS extender family. It's available through the Lightware Device Controller and can be configured to detect LW3 protocol CHANGE messages. The Event Manager was developed to handle tasks from the most simple; like displaying internal events on GPIO ports, and controlling the extender via GPIO inputs instead of front panel pushbuttons; to expert ones like controlling the rolling shutter, the air conditioning system or the lights based on any condition changes on the media ports, such as a new source being connected or removed. The Event Manager makes the UMX-TPS extender family an expert solution in a wider range of applications.

### Event Manager Wizard


Assigning an action to a condition is quick and easy with the Event manager's smart Wizard function. The user can choose from the given port options in the dropdown menu and also add expressions to it.

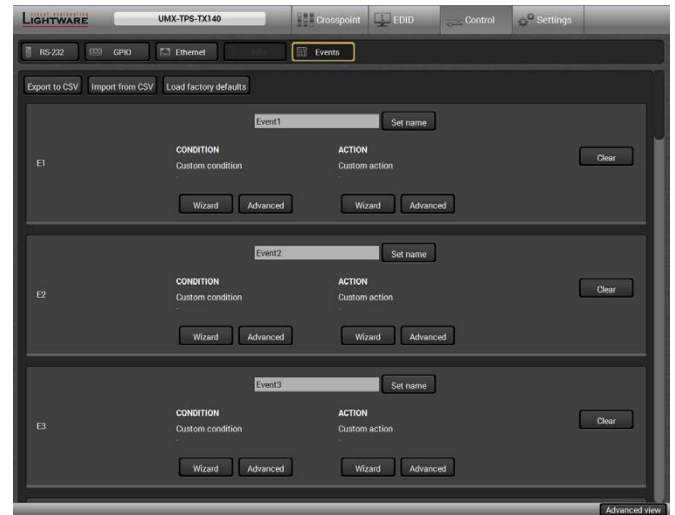


The Events menu contains 20 separately configurable Events

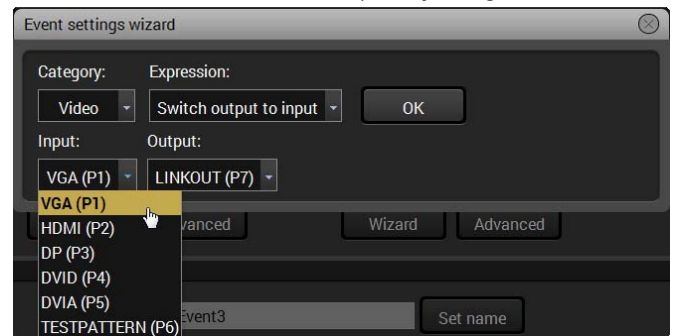

The Event Wizard makes the setup easy with simple dropdown options

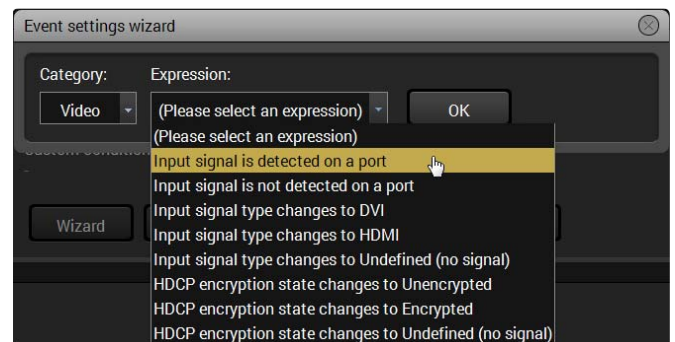


There are many default Expression available to choose from

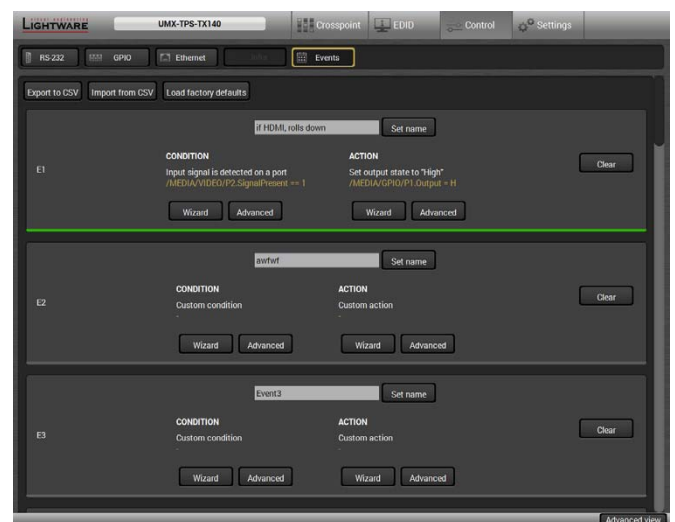

Green lines show which Event is configured and active, the rest stay grey


## Event example A

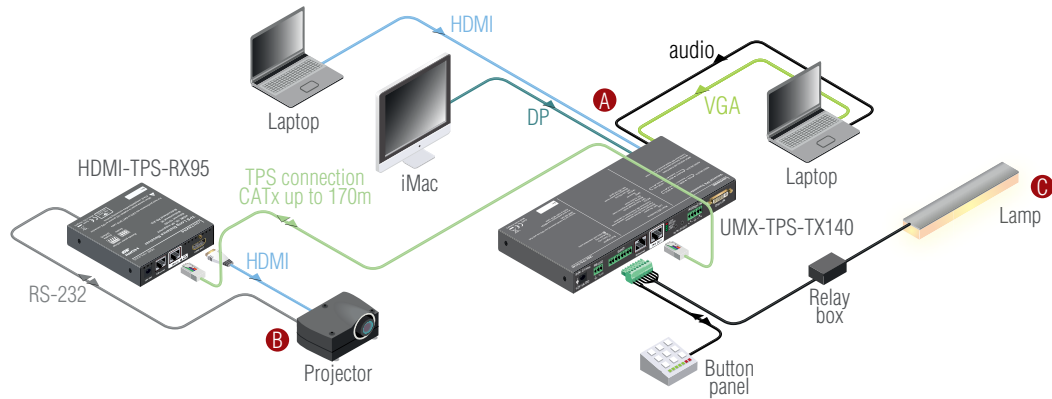

Condition	Action
 Press button panel	 <span style="color: red; font-weight: bold;">A</span> Input select
	 <span style="color: red; font-weight: bold;">B</span> Projector switch on
	 <span style="color: red; font-weight: bold;">C</span> Lamp switch off

With a connected button panel through the GPIO port the UMX-TPS-TX140 can be controlled from a remote location, input switching is available even if the transmitter mounted underdesk. In the example above there are three actions followed by a condition. When an input selector button is pressed on the remote button panel, the input port is switched to the selected one, the lamp switches off, and the projector turns on as well.


## Event example B

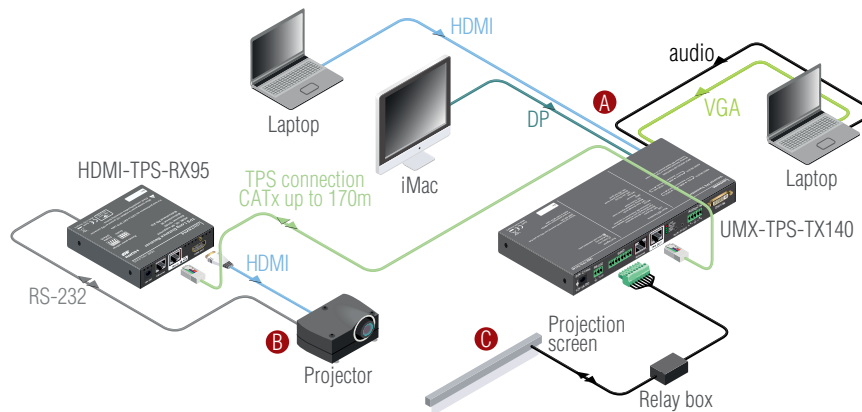





Condition	Action
	 <span style="color: red; font-weight: bold;">A</span> Input select
	 <span style="color: red; font-weight: bold;">B</span> Projector switch on
	 <span style="color: red; font-weight: bold;">C</span> Screen down

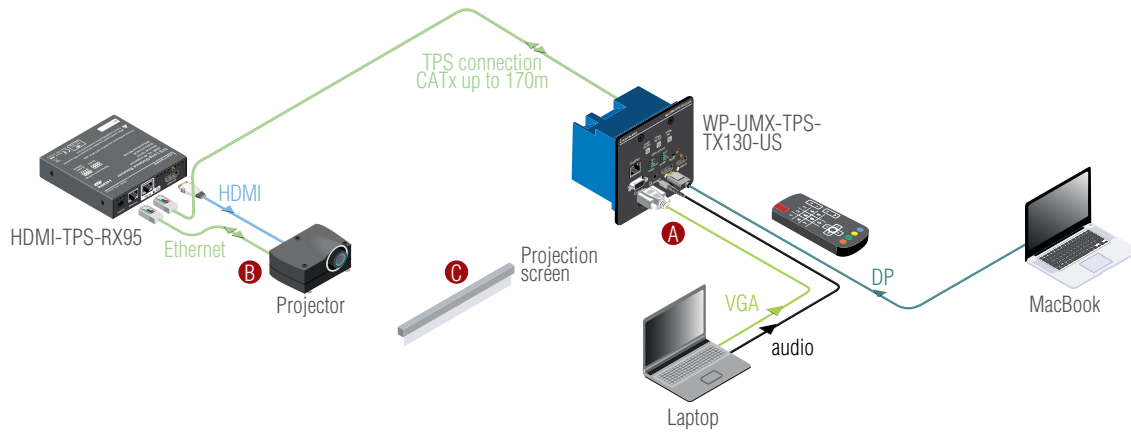The projector and the rolling screen (through the Relay box) are connected to the UMX-TPS-TX140. When the user connects a laptop through HDMI to the transmitter the connected input is selected automatically the screen goes down and the projector turns on to display the connected source.

Event example C



Condition	Action	
 Press remote controller		<b>A</b> Input select
		<b>B</b> Projector switch on
		<b>C</b> Screen down

A MacBook with DisplayPort and another laptop with VGA and analog audio are connected to the WP-UMX-TPS-TX130-US wallplate which means there are two audio signals and two video signals connected. With a remote controller via IR these inputs can be switched. For example the analog audio of the Laptop can be mixed with the DisplayPort video of the MacBook. The Event Manager helps the user to assign actions like rolling the screen down and switch the projector on when the desired input is selected.

## Applications

- Small classrooms
- Conference rooms, meeting rooms
- Control room
- Home cinema

## Features


- 4K and UHD video
- Extends HDMI or VGA + Audio + Ethernet + RS-232 + IR over a single CAT5e...CAT7e cable up to 170 m distance\*
- Audio and video connectors: HDMI, VGA, Stereo jack
- Embedded 7.1 HBR audio support
- Separate audio and video transmission
- Autoselect mode: video and audio priority modes
- Intuitive Control Software
- Event Manager
- 10/100 Ethernet extension
- Bi-directional RS-232 and IR
- IR and RS-232 connection supports command injection
- HDCP compliant, CEC, EDID transparent
- Embeds analog audio
- HDBaseT compatibility
- Advanced EDID management
- No signal latency
- Frame detector
- Remote powering through CAT cable

\*Depends on cable category and quality

## Compatible products

- MX Modular matrix frames with MX-TPS-IB or MX-TPS2-IB
- HDMI-TPS-RX90
- MODEX TPS family
- DVI-HDCP-TPS-RX95
- HDMI-TPS-RX95

### Locking DC plug

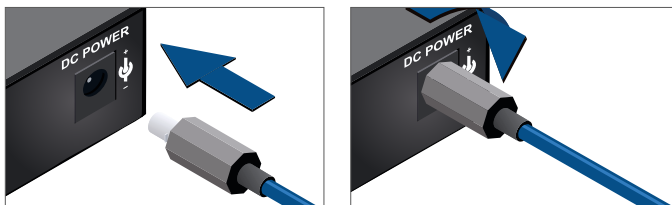

Twist 90° clockwise to lock

### Transmitter front and back view



UMX-TPS-TX120

## Specification

Resolution:	Up to 4K UHD 3840x2160@30Hz, 1600x1200@60Hz, FullHD 1920x1080@60Hz
Digital audio formats:	Supports up to 8 channel PCM, Dolby TrueHD and DTS-HD Master Audio 7.1 formats
Input cable equalization:	Automatic max 20 m
EDID emulation:	Yes, Advanced EDID Management
EDID memory:	119 factory preset, 15 user programmable
VGA to digital conversion:	0 microseconds delay
HDCP pass-through:	Yes
RS-232 pass-through:	Yes, configurable
RS-232 (control option):	9600, 19200, 38400, 57600, 115200 Baud Rx,Tx (local or through CATx)(default: 57600)
Local power:	Universal power adaptor, DC 12V 2.5A
Power over TPS:	DC 48V 1A
Power consumption:	8W (typ)
Enclosure:	1 mm metal
Dimensions:	221 W x 100.4 D x 26 H mm
Net weight:	629 g
Compliance:	CE
Warranty:	3 years


## Connectors

Digital video input:	HDMI connector
Analog video input:	VGA connector
Audio input:	Stereo jack
Ethernet:	1 x RJ45
Control:	IR
TPS output:	1 x RJ45
Serial port:	3-pole PHOENIX
Power:	Locking DC connector (2.1 / 5.5 mm)

## Analog audio input

Volume:	-96 .. 0 dB
Balance:	0 .. 100%

## Port diagram

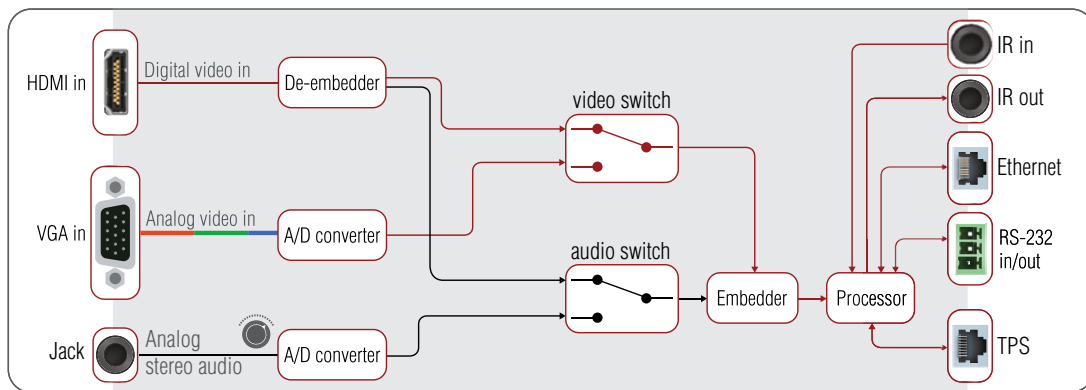

## Supplied accessories



### PSU-12VU Universal DC adaptor (Part No: 1180 0051)

Wall power adaptor with interchangeable plug for international use.  
Universal input: 100-240 V AC, 50-60 Hz, output: 12 V DC, 2.5 A



### IR emitter and IR eye (Part No: 1374 0003 TX, 1374 0002 RX)

IR emitter is supplied with TPS-TX, IR eye is supplied with TPS-RX units. Needed for IR extension.

## Optional accessories



### Under desk mounting kit double (Part No: 5240 0276)

The UD-kit double makes it easy to mount multiple devices on any flat surface (e.g. furniture).



### Rack shelf (Part No: 5240 0269)

1U high rack shelf provides mounting holes for fastening four quarter-rack sized units. Pocket sized devices can also be fastened on the shelf.