

# 24-Port 10/100Mbps Fast Ethernet Switch



### Power-Saving, High Performance Ethernet Networking

In line with the energy-saving trend worldwide, PLANET delivers the new generation **Green Networking Switch- FNSW-2401**. The FNSW-2401 is a 24-Port 10/100Base-TX Fast Ethernet Switch upgraded from earlier version and brings both benefits of energy saving and high performance. It is specially designed for SOHO, SMB and Workgroup users. The FNSW-2401 uses new engine that provides power saving up to 12% less energy but maintains high performance efficiently.

**Power Saving 12%**



**Save  
19,272 Watts  
yearly**

### Energy Saving

The FNSW-2401 incorporates advanced Green Networking technologies:

- **Intelligent scales power based on cable length**

The **intelligent scales power** is an intelligent algorithm that actively determines the appropriate power level based on cable length. When connecting to the FNSW-2401 with Ethernet cable longer than 10m, a device can obtain maximum power saving because the FNSW-2401 would automatically detect the Ethernet cable length and reduce power usage. The connected device can substantially reduce overall power consumption, which makes a significant contribution to energy saving.

### High Performance

The high performance throughput (filtering/forwarding rate: 14,880 packets per second in 10Mbps, 148,800pps in 100Mbps) and dynamic shared memory buffer help the FNSW-2401 boost bandwidth, eliminate unnecessary traffic, and relieve congestion on your critical server path. The FNSW-2401 is the ideal choice to alleviate bottlenecks in client / server and peer-to-peer environments in a cost effective way.

### Plug and Play

The FNSW-2401 provides users with high speed network connections. With its Auto-Negotiation capability, all the RJ-45/STP ports of the FNSW-2401 can be configured to speeds of 10/20Mbps or 100/200Mbps automatically. What's more is the MDI/ MDIX auto-detection for easy, plug and play connection, regardless of the cabling type, straight through or crossover.

## KEY FEATURES

### PHYSICAL PORT

- 24 -Port 10/100Mbps Fast Ethernet ports
- Supports Auto MDI/MDI-X function

### LAYER 2 FEATURES

- Comply with IEEE 802.3, 10Base-T, IEEE 802.3u 100Base-TX Ethernet standard
- Supports powerful Green Ethernet to power saving
- Features Store-and-Forward mode with wire-speed filtering and forwarding rates
- Handles up to 1522 bytes packet size
- Comply IEEE 802.3x flow control for full duplex operation and Backpressure for half duplex operation

- Integrated address look-up engine, support 8K absolute MAC addresses
- Automatic address learning and address aging
- Support CSMA/CD protocol

### HARDWARE FEATURES

- 100~240V AC, 50~60Hz, 0.6A universal Power input
- FCC, CE class A compliant


## APPLICATIONS

### Backbone Switch

With up to 4.8Gbps switching fabric, the FNSW-2401 can provide high bandwidth connectivity to Fast Ethernet network backbone or as the backbone of your workgroup.

### Department Switch

Uplink directly by any straight / crossover cable to the backbone switch, the FNSW-2401 provides the connectivity to back plane yet segment the network traffic of the department to your backbone.

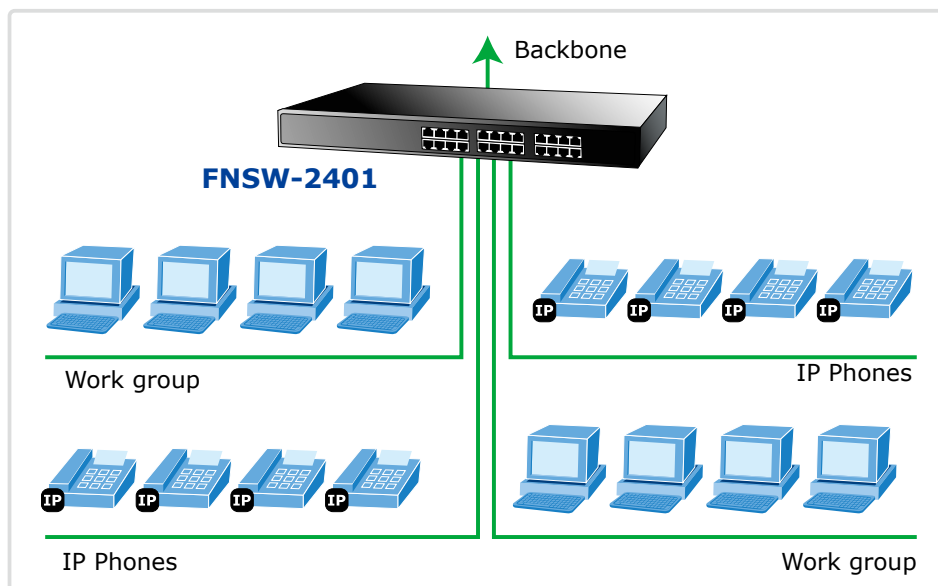

## SPECIFICATION

Product	24-Port 10/100Mbps Fast Ethernet Switch
Model	FNSW-2401
<b>Hardware Specification</b>	
10/100Base-TX MDI/MDIX Ports	24
Throughput (packet per second)	3.57Mpps
Switch Fabric	4.8Gbps
Weight	1.7kg
Power Consumption / Dissipation	4 Watts / 13 BTU
Power Requirement	100~240V AC, 50/60Hz, 0.6A
Dimensions (W x D x H)	440 x 180 x 44mm, 1U height
Switch Processing Scheme	Store-and-Forward
Address Table	8K entries
Packet Buffer	2Mbit SRAM
Power Green Ethernet	10m ~ 50m: Saving up to 12%
Flow Control	Back pressure for half duplex, IEEE 802.3x Pause Frame for full duplex
Temperature	Operating: 0~50 Degree C Storage: -10~70 Degree C
Humidity Operating:	Operating: 5% to 95%, Storage: 5% to 95% (Non-condensing)
<b>Standards Conformance</b>	
Regulation Compliance	FCC Part 15 Class A, CE
Standards Compliance	IEEE 802.3 (Ethernet) IEEE 802.3u (Fast Ethernet) IEEE 802.3x (Full-Duplex Flow Control)

## ORDERING INFORMATION

FNSW-2401	24-Port 10/100Mbps Fast Ethernet Switch
-----------	---

2015-06

Ein Vertriebsprodukt von:

**VIDELCO** Europe Limited – Professionelle Audio-, Video-, Medien-Technik  
Fon: +49 (0)2102 / 86 39-00 • Fax: +49 (0)2102 / 86 39-17 • info@videlco.eu • www.videlco.eu